

## Ultra thin wall mountad Glass panel and DMX lighting controller

This quick start guide contains important information on the safe operation of the product. Read and follow the safety advice and instructions given. Retain the quick start guide for future reference. If you pass the product on to others please include this quick start guide.

### Safety instructions

#### Intended use:

This device is intended to control lighting devices and effects via computer using appropriate software. Any other use or use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.

#### General handling:

- Never use force when handling the product
- Never immerse the product in water
- Just wipe it with a clean dry cloth.
- Do not use liquid cleaners such as benzene, thinners or flammable cleaning agents

#### Never use the product:

- In direct sunlight
- In conditions of extreme temperature or humidity
- In extremely dusty or dirty areas
- At locations where the unit can become wet
- Near magnetic fields



**Choking hazard!**

#### Danger for children:

Ensure that plastic bags, packaging... are disposed of properly and are not within reach of babies and young children. Choking hazard! Ensure that children do not detach any small parts from the product. They could swallow the pieces and choke!

### Features

#### Hardware features:


512 or 1024 channels DMX output  
512 (1 zone), 1024 (5 zones with zone combinations)  
Fine Control touch wheel  
Play Scene, Color, Speed, Dimmer, Zones or Pages  
Internal memory + Micro SD card slot  
4 Contacts on 3-5V  
Real Time Clock and calendar for each scene  
USB-C (5V, DC, 0.1A), RJ45 (Contacts, Master/Slave)  
7 Pin Terminal Block (DMX1, DMX2, DC Power)  
Power input: 5-36V DC, 0.1A / Output: 5V DC  
Housing: ABS, glass (panel)  
Dimensions : H: 144 (5.67) / W: 97 (3.82) / D: 10 (0.39)  
Operating Temperatures: -40 to +85 C° / -40 to 185 F°  
International Warranty: 5 years

#### Device options:


Fine wheel control for RGB Colours, CCT, Speed, Dimmer  
Scenes, up to 8 per Zone  
Pages, up to 5 with 8 scenes per page  
Scene Recovery if power cut off / Default start scene  
Clock schedule setup easily per hour, day, week, month, year and repeat year.  
Cross Fade time between scenes  
Standby panel display animations  
Auto blackout LED panel after 4s  
16-bit and fine channel management  
Master/Slave synchronization, connect up to 32 devices

### TOUCH mounting


①




②



③



## Panel operation

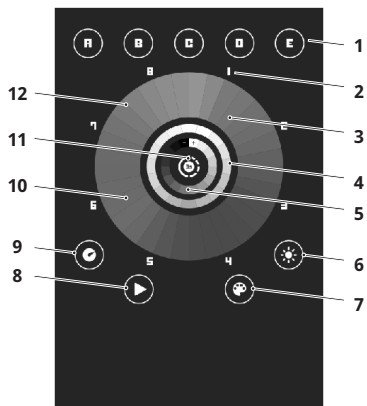


- 1. Zone selection (TOUCH 1024) | Page selection (TOUCH 512)**  
Tap to select zones/Pages individually. Hold 2s to combine Zones
- 2. Scenes #**  
Pick 1-8 (8 scenes per Zone or Page)
- 3. Colour wheel**  
Pick RGB-AW colour for the selected zone (Colour mode selected)
- 4. Colour temperature**  
Pick cool to warm white for the selected zone (CCT mode selected)
- 5. Dimmer intensity**  
Dial the wheel to adjust light intensity (+/-) (Dimmer mode selected)
- 6. Dimmer mode activation**  
Use the wheel to adjust brightness for selected zone (Active for 5s)
- 7. Colour mode activation**  
Use the wheel to pick RGB-Amber-White colour.  
Hold 3s to enter cool/warm white mode
- 8. Scene mode activation**  
Use the wheel to start or stop the selected scene
- 9. Speed mode Activation**  
Use the wheel to change the current scene speed (Active for 5s)
- 10. Scene speed**  
Dial the wheel to adjust scene playback speed (+/-) (Speed mode selected)
- 11. On / Off**  
Tap to cancel wheel settings (Hold 3s for black out)
- 12. Tactile wheel picker and dial**  
Adjust colour temperature, intensity (+/-) or speed (+/-) and scenes

## 7 Pin Terminal Pinout



1. DMX1-
2. DMX1+
3. GND (DMX 1+2)
4. DMX2-
5. DMX2+
6. GND (Power Input)
7. DC Power Input (VCC, 5-36V / (0.1A)

## RJ45 Pinout



1. GND
2. 5V DC Output - For triggers
- 3-6. TRIG A, B, C, D - Dry Contact pins
7. M/S DATA - Master/Slave Data
8. M/S CLK - Master/Slave Clock

## Programming the device and Playback

- Download and install the free lighting control software and USB drivers
- Connect your device to your computer via the included USB-C cable
- Start the software (your interface will be detected automatically)
- Configure the software according your DMX lighting fixture setup
- Program scenes and sequences using the lighting control software
- Save the programmed scenes and sequences into the internal memory
- Close the software. Your panel is now ready to operate in standalone mode