


datavideo

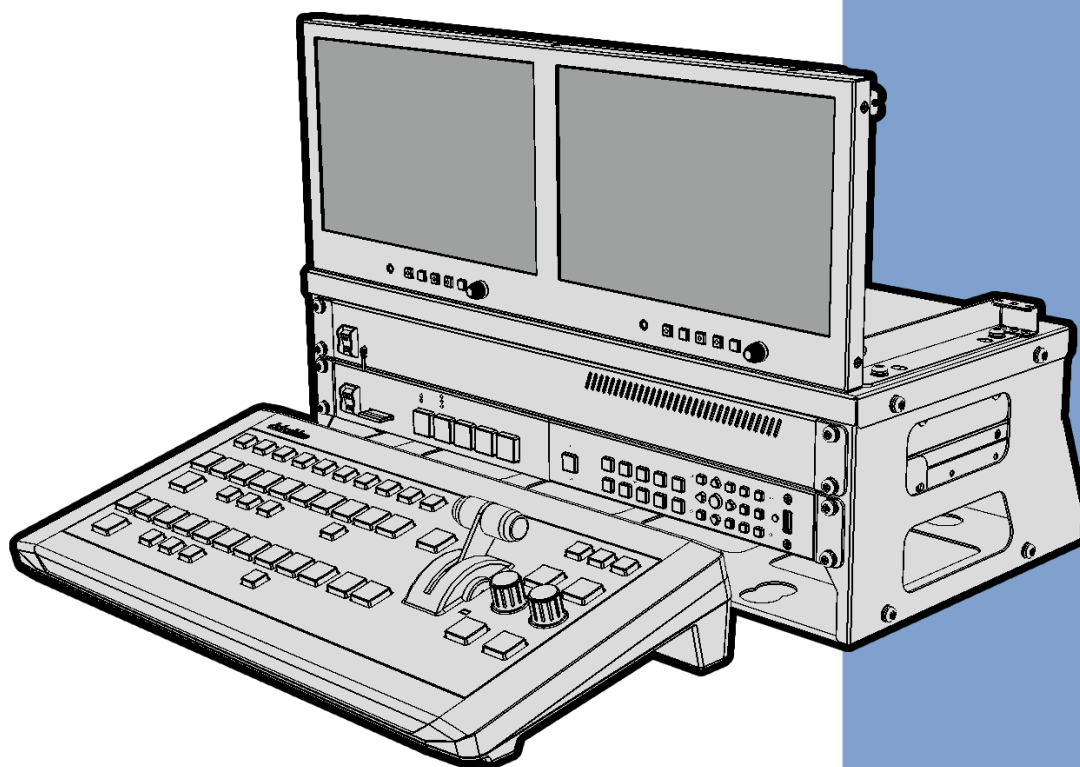

**6 CHANNEL HD
PORTABLE VIDEO
PRODUCTION STUDIO
GO 1200 STUDIO
Instruction manual**

www.datavideo.com

Contents

FCC COMPLIANCE STATEMENT	3
WARNINGS AND PRECAUTIONS	3
WARRANTY	4
<i>STANDARD WARRANTY</i>	4
<i>THREE YEAR WARRANTY</i>	4
DISPOSAL	4
INTRODUCTION	5
FEATURES	5
GO 1200 STUDIO	6
INSTALLATION	7
TRANSPORT & PLACEMENT	7
OPENING THE CASE	7
SETTING UP THE TLM-102 – DUAL 10.1” LCD MONITOR.....	7
HOW TO CONNECT INTERNAL CABLES	8
POWERING ON	14
POWERING OFF	14
PACKING AWAY	14
DIMENSIONS	15
WEIGHTS	16
SPECIFICATIONS	16
SERVICE AND SUPPORT	20

Disclaimer of Product and Services

The information offered in this instruction manual is intended as a guide only. At all times, Datavideo Technologies will try to give correct, complete and suitable information. However, Datavideo Technologies cannot exclude that some information in this manual, from time to time, may not be correct or may be incomplete. This manual may contain typing errors, omissions or incorrect information. Datavideo Technologies always recommend that you double check the information in this document for accuracy before making any purchase decision or using the product. Datavideo Technologies is not responsible for any omissions or errors, or for any subsequent loss or damage caused by using the information contained within this manual. Further advice on the content of this manual or on the product can be obtained by contacting your local Datavideo Office or dealer.

FCC Compliance Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Warnings and Precautions



The GO 1200 Studio is HEAVY, the weigh is about 22kg. At least two people are required to move this unit. It needs two people to move the GO 1200 Studio out of the carton. If the system is packed in the 19" flight case, it needs one person only to move the GO 1200 Studio.

The GO 1200 Studio should be always moved and placed in a horizontal position; do not place or try to move the unit in any other position as damage or injury could result.

Always use a trolley to safely transport the unit over distances of 2 metres or more.

1. Read all of these warnings and save them for later reference.
2. Follow all warnings and instructions marked on this unit.
3. Unplug this unit from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
4. Do not use this unit in or near water.
5. Do not place this unit on an unstable cart, stand, or table. The unit may fall, causing serious damage.
6. Slots and openings on the cabinet top, back, and bottom are provided for ventilation. To ensure safe and reliable operation of this unit, and to protect it from overheating, do not block or cover these openings. Do not place this unit on a bed, sofa, rug, or similar surface, as the ventilation openings on the bottom of the cabinet will be blocked. This unit should never be placed near or over a heat register or radiator. This unit should not be placed in a built-in installation unless proper ventilation is provided.
7. This product should only be operated from the type of power source indicated on the marking label of the AC adapter. If you are not sure of the type of power available, consult your Datavideo dealer or your local power company.
8. Do not allow anything to rest on the power cord. Do not locate this unit where the power cord will be walked on, rolled over, or otherwise stressed.
9. If an extension cord must be used with this unit, make sure that the total of the ampere ratings on the products plugged into the extension cord do not exceed the extension cord rating.
10. Make sure that the total amperes of all the units that are plugged into a single wall outlet do not exceed 15 amperes.
11. Never push objects of any kind into this unit through the cabinet ventilation slots, as they may touch dangerous voltage points or short out parts that could result in risk of fire or electric shock. Never spill liquid of any kind onto or into this unit.
12. Except as specifically explained elsewhere in this manual, do not attempt to service this product yourself. Opening or removing covers that are marked "Do Not Remove" may expose you to dangerous voltage points or other risks, and will void your warranty. Refer all service issues to qualified service personnel.
13. Unplug this product from the wall outlet and refer to qualified service personnel under the following conditions:
 - a. When the power cord is damaged or frayed;
 - b. When liquid has spilled into the unit;
 - c. When the product has been exposed to rain or water;
 - d. When the product does not operate normally under normal operating conditions. Adjust only those controls that are covered by the operating instructions in this manual; improper adjustment of other

controls may result in damage to the unit and may often require extensive work by a qualified technician to restore the unit to normal operation;

- e. When the product has been dropped or the cabinet has been damaged;
- f. When the product exhibits a distinct change in performance, indicating a need for service.

Warranty

Standard Warranty


- Datavideo equipment are guaranteed against any manufacturing defects for one year from the date of purchase.
- The original purchase invoice or other documentary evidence should be supplied at the time of any request for repair under warranty.
- The product warranty period begins on the purchase date. If the purchase date is unknown, the product warranty period begins on the thirtieth day after shipment from a Datavideo office.
- All non-Datavideo manufactured products (product without Datavideo logo) have only one year warranty from the date of purchase.
- Damage caused by accident, misuse, unauthorized repairs, sand, grit or water is not covered under warranty.
- Viruses and malware infections on the computer systems are not covered under warranty.
- Any errors that are caused by unauthorized third-party software installations, which are not required by our computer systems, are not covered under warranty.
- All mail or transportation costs including insurance are at the expense of the owner.
- All other claims of any nature are not covered.
- All accessories including headphones, cables, and batteries are not covered under warranty.
- Warranty only valid in the country or region of purchase.
- Your statutory rights are not affected.

Three Year Warranty

- All Datavideo products purchased after July 1st, 2017 are qualified for a free two years extension to the standard warranty, providing the product is registered with Datavideo within 30 days of purchase.
- Certain parts with limited lifetime expectancy such as LCD panels, DVD drives, Hard Drive, Solid State Drive, SD Card, USB Thumb Drive, Lighting, Camera module, PCIe Card are covered for 1 year.
- The three-year warranty must be registered on Datavideo's official website or with your local Datavideo office or one of its authorized distributors within 30 days of purchase.



Disposal



For EU Customers only - WEEE Marking

This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste

equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.



CE Marking is the symbol as shown on the left of this page. The letters "CE" are the abbreviation of French phrase "Conformité Européene" which literally means "European Conformity". The term initially used was "EC Mark" and it was officially replaced by "CE Marking" in the Directive 93/68/EEC in 1993. "CE Marking" is now used in all EU official documents.

Introduction

Go 1200 Studio is a small live production system housing all required devices for a multi-camera production environment on a small rack. The Go 1200 Studio includes video switching, dual monitor, stream encoder, and USB recorder. These devices can be carried away in a box so that your production is not only be professional but also mobile.

It offers four HD SDI and two HDMI inputs of switcher, also supports Chroma Keyer, Luma Key, PIP.

Features

- Provides a suitcase type total solution with great protection and easy-to-move advantages.
- The 4-in-1 system includes the following:
 - Switcher
 - Streaming Server
 - Recorder
 - Monitor
- Integrated power-supply unit to supply all power needed for all integrated devices. Press one button only to power-on the whole system.
- Supports broadcast quality dual-chroma-key function and provides 50 sets of built-in virtual background.
- Provides 9 sets of built-in stinger transition.

Front Panel

TLM-102: Foldable 4RU rack mount dual monitor providing connections for **SDI** and **HDMI** videos

HDR-1: 1080p30 frame recorder recording to **MP4** file format.

NVS-33: H.264 video streaming server for streaming **HDMI** and **SDI** videos over the Ethernet network.



SE-1200 MU: **HD** digital video switcher offering 6 inputs (4 x HD-SDI & 2 x HDMI) and 4 outputs (2 x HD-SDI and 2 x HDMI) , the switcher supports video formats up to **Full HD 1080i**.

RMC-260: RMC-260 is an RS-232 interface control panel for the SE-1200 MU which provides physical switcher-like operating experience for users.

Rear Panel

RMK-6: The LAN port provides **video stream OUT** to destination devices.

DC IN socket connects the 12V power and supplies power to all integrated devices. The switch acts as a central switch for the entire system.

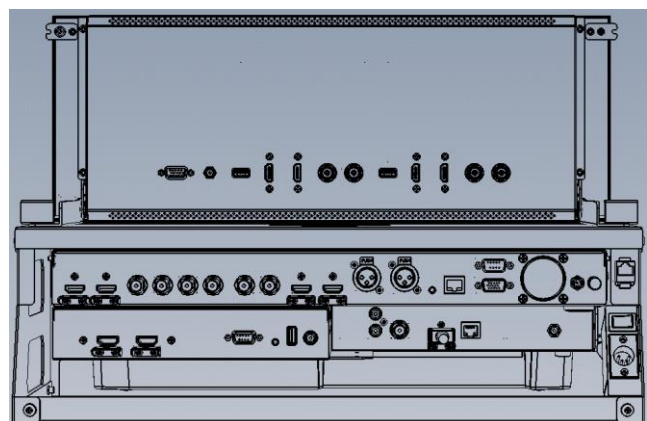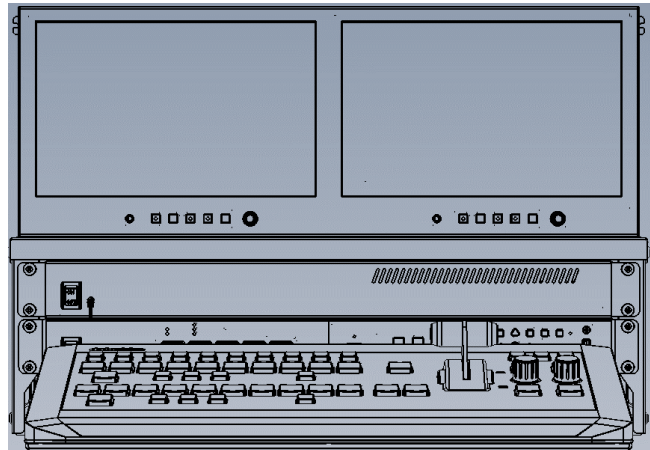

Installation

Transport & Placement

The GO 1200 Studio is heavy and the weight is about 22kg – Do not attempt to lift or move it on your own. It's recommended to have at least two people to move the GO 1200 Studio out of the carton. If the GO 1200 Studio is packed in the 19" flight case, it needs one person only to move the system.

Always use a trolley to safely transport the GO 1200 Studio over distances of 2 Metres or more. The unit should be always moved and placed in a horizontal position; do not place or try to move the unit in any other way as damage or injury could result.

Place the GO 1200 Studio on a strong, stable, flat surface that is capable of supporting the weight. Do not use a folding or single leg table to support the GO 1200 Studio.

Opening the Case

1. Rest the HC-800 on a flat horizontal surface with the carry handle facing the user
2. Open the buckles on two sides of the carry handle.
3. Lift open the cover
4. Remove the GO1200 Studio system from the case.



Setting up the TLM-102 – Dual 10.1" LCD Monitor


1. Bring the LCD panel into an upright viewing position.
2. After that, please refer to following chapter “**How to Connect Internal Cables**” to connect all the cables according to the instructions.
3. After all of the cables are connected properly, just remember to turn on the power switch and then it's time for you to enjoy the efficiency and the convenience of the GO 1200 Studio.

How to Connect Internal Cables


Cable requirements:

- Cable No. 1-5: DC Plug Cable built into the RMK-6
- Cable No. 6: HDMI Cable
- Cable No. 7: HDMI Cable
- Cable No. 8: BNC 180 Degree Cable
- Cable No. 9: BNC 180 Degree Cable
- Cable No. 10: BNC 180 Degree Cable
- Cable No. 11: Ethernet Cable
- RS-232 9 pin male to male cable


1. Please connect one end of the Cable No. 6 (HDMI cable) from the HDMI OUT 1 interface on the rear panel of the SE-1200MU to the HDMI IN interface on the rear panel of the HDR-1.

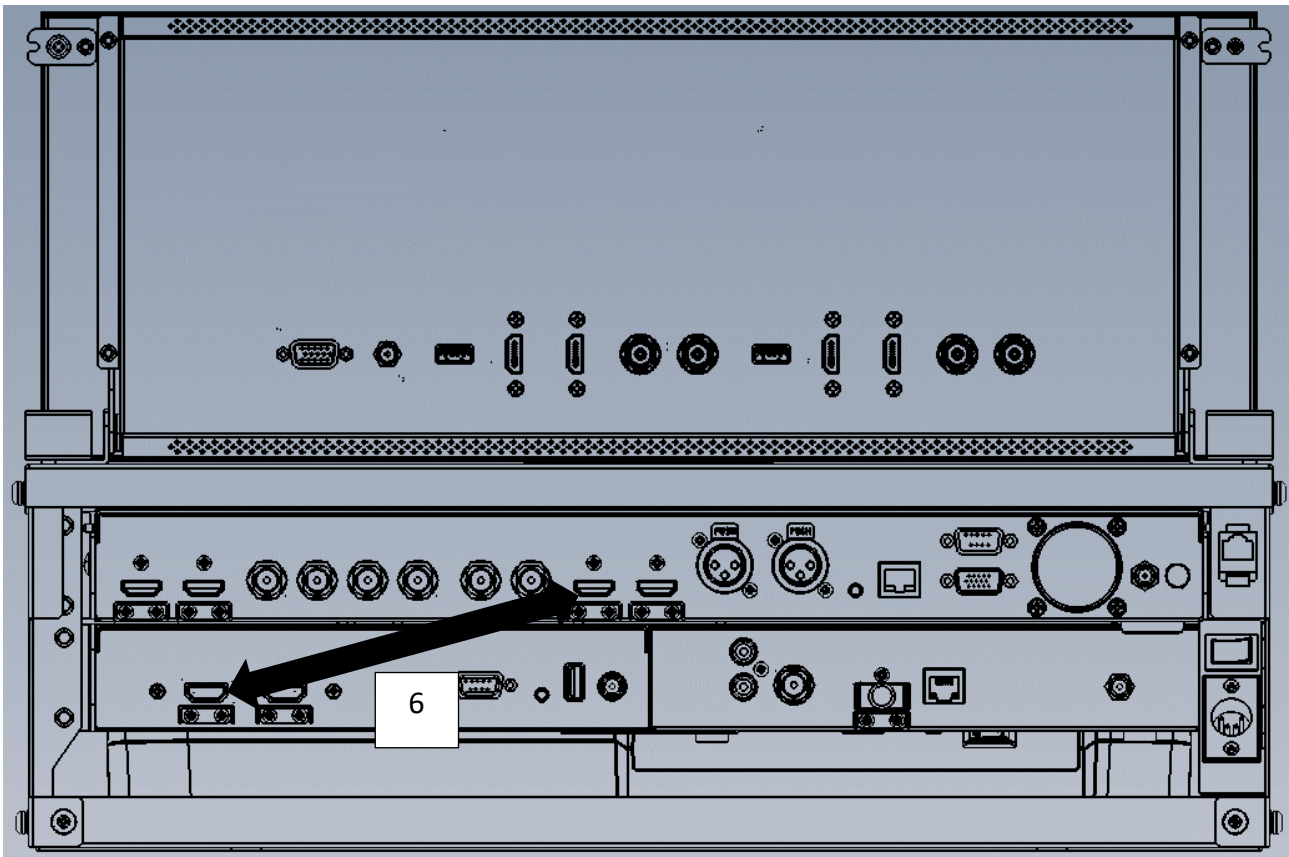


2. Please connect the Cable No.7 (HDMI Cable) from the HDMI OUT interface on the rear panel of the HDR-1 to the HDMI IN2 interface on the rear panel of the TLM-102.

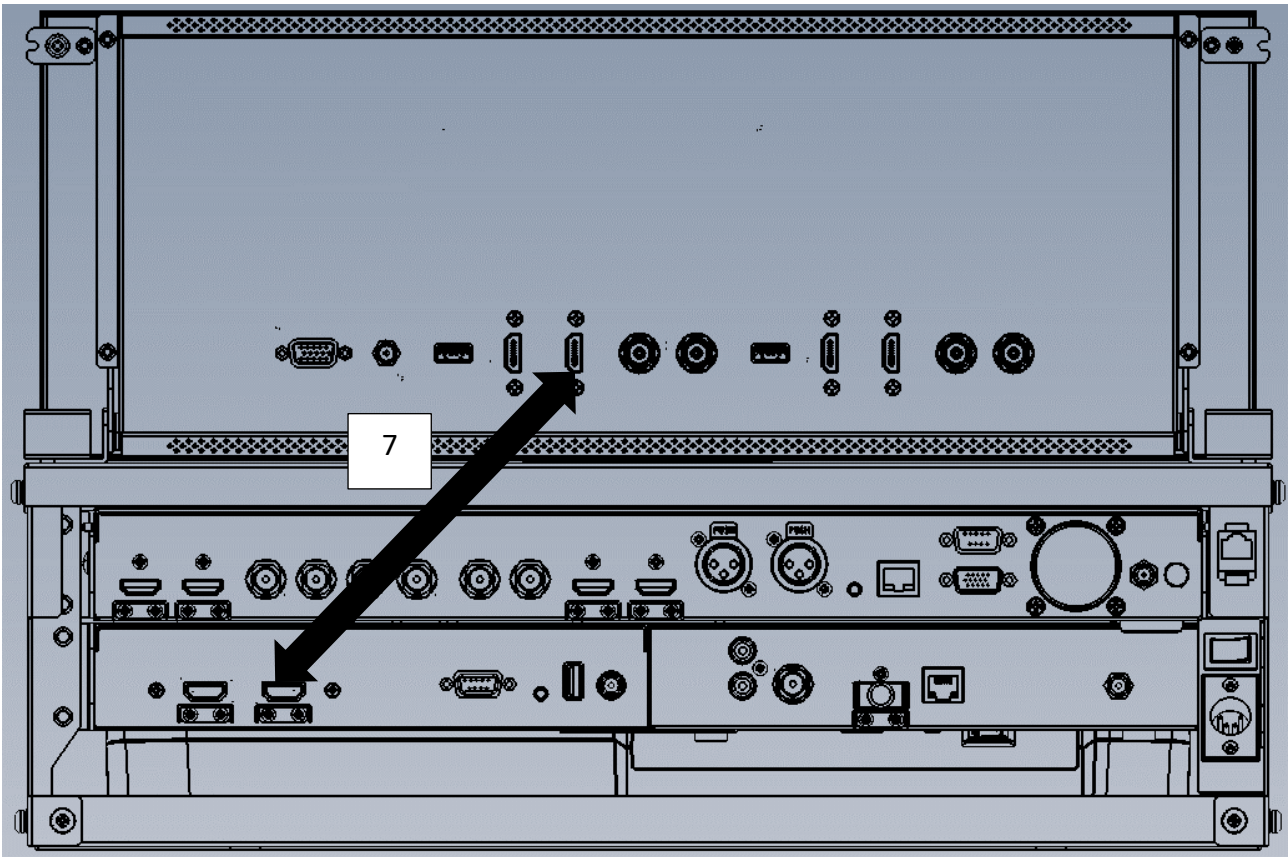


3. Please connect the Cable No. 8 (BNC 180 Degree Cable) from the SDI OUT1 interface on the rear panel of the SE-1200MU to the SDI IN 1 interface on the rear panel of the TLM-102.

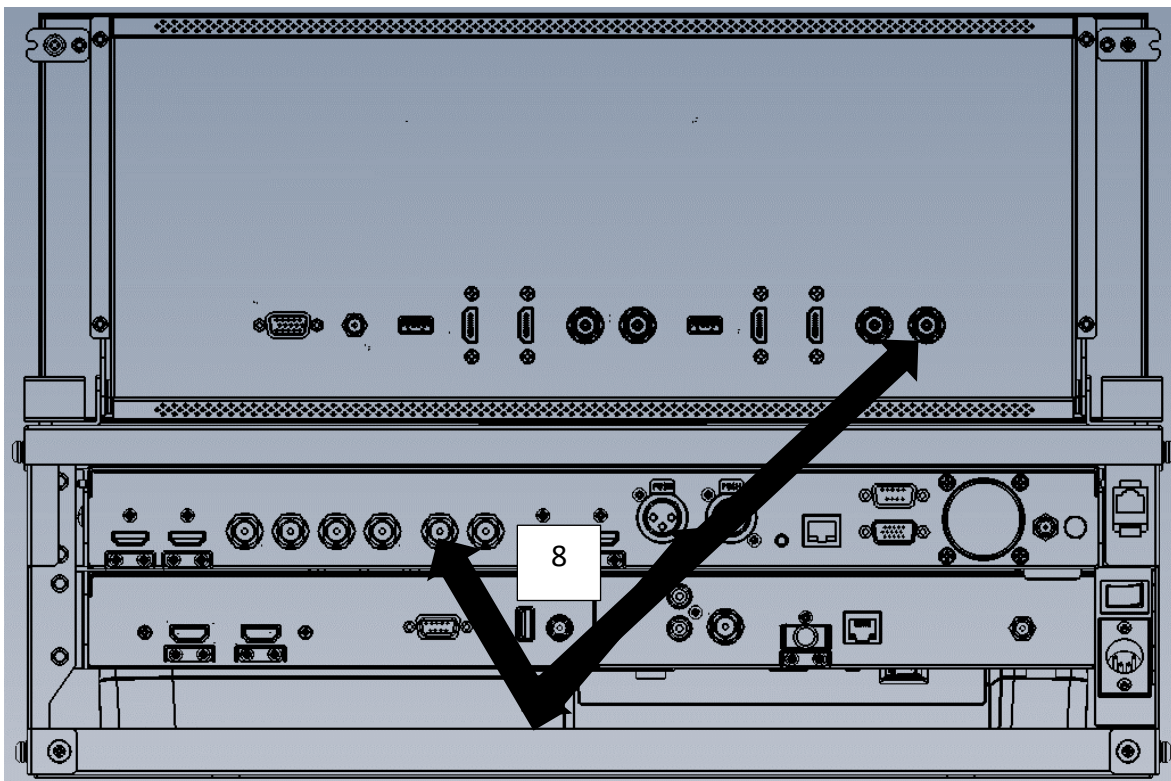


4. Please connect the Cable No. 9 (BNC 180 Degree Cable) from the SDI OUT2 interface from the rear panel of the SE-1200MU to the SDI IN2 interface on the rear panel of the TLM-102.

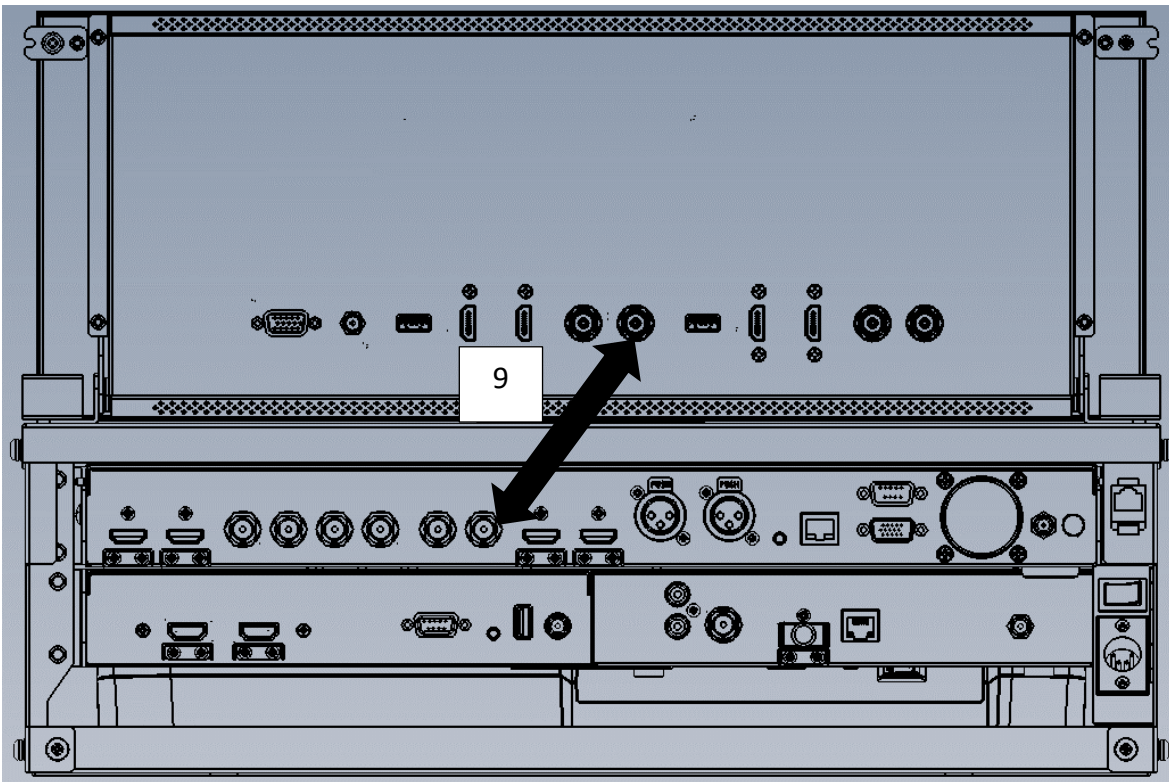


5. Please connect the Cable No. 10 (BNC 180 Degree Cable) from the SDI OUT 2 interface on the rear panel of the TLM-102 to the SDI IN interface on the rear panel of the NVS-33.

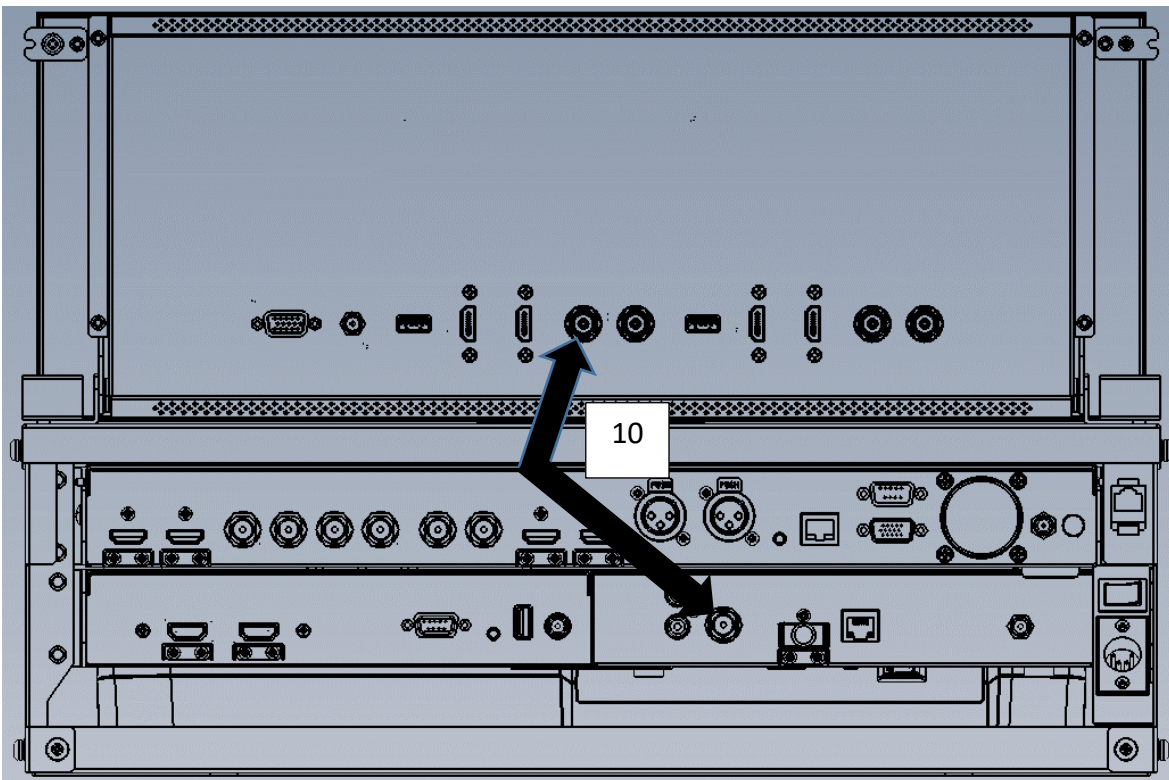


6. Please connect the Cable No. 11 (Ethernet Cable) from the LAN interface on the rear panel of the NVS-33 to the RMK-6's RJ-45 interface on the inner side of the RMK-6.

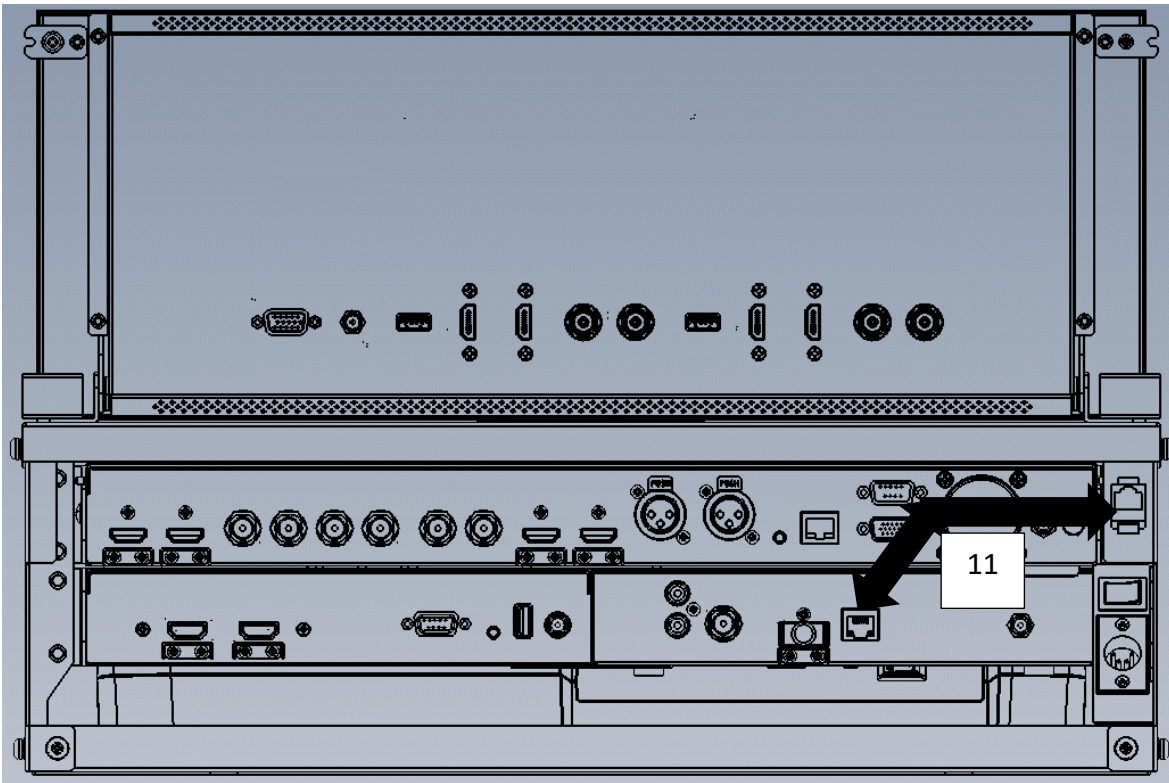

7. First locate the DC jack on the RMK-6 and on the inner side of the DC jack, you should find five DC plug cables attached. Connect Cable No. 1 / 2 / 3 / 4/5 (DC Plug Cable) to the RMC-260, TLM-102, NVS-33, HDR-1 and SE-1200 MU DC jacks respectively and secure by tightening the outer fastening ring.

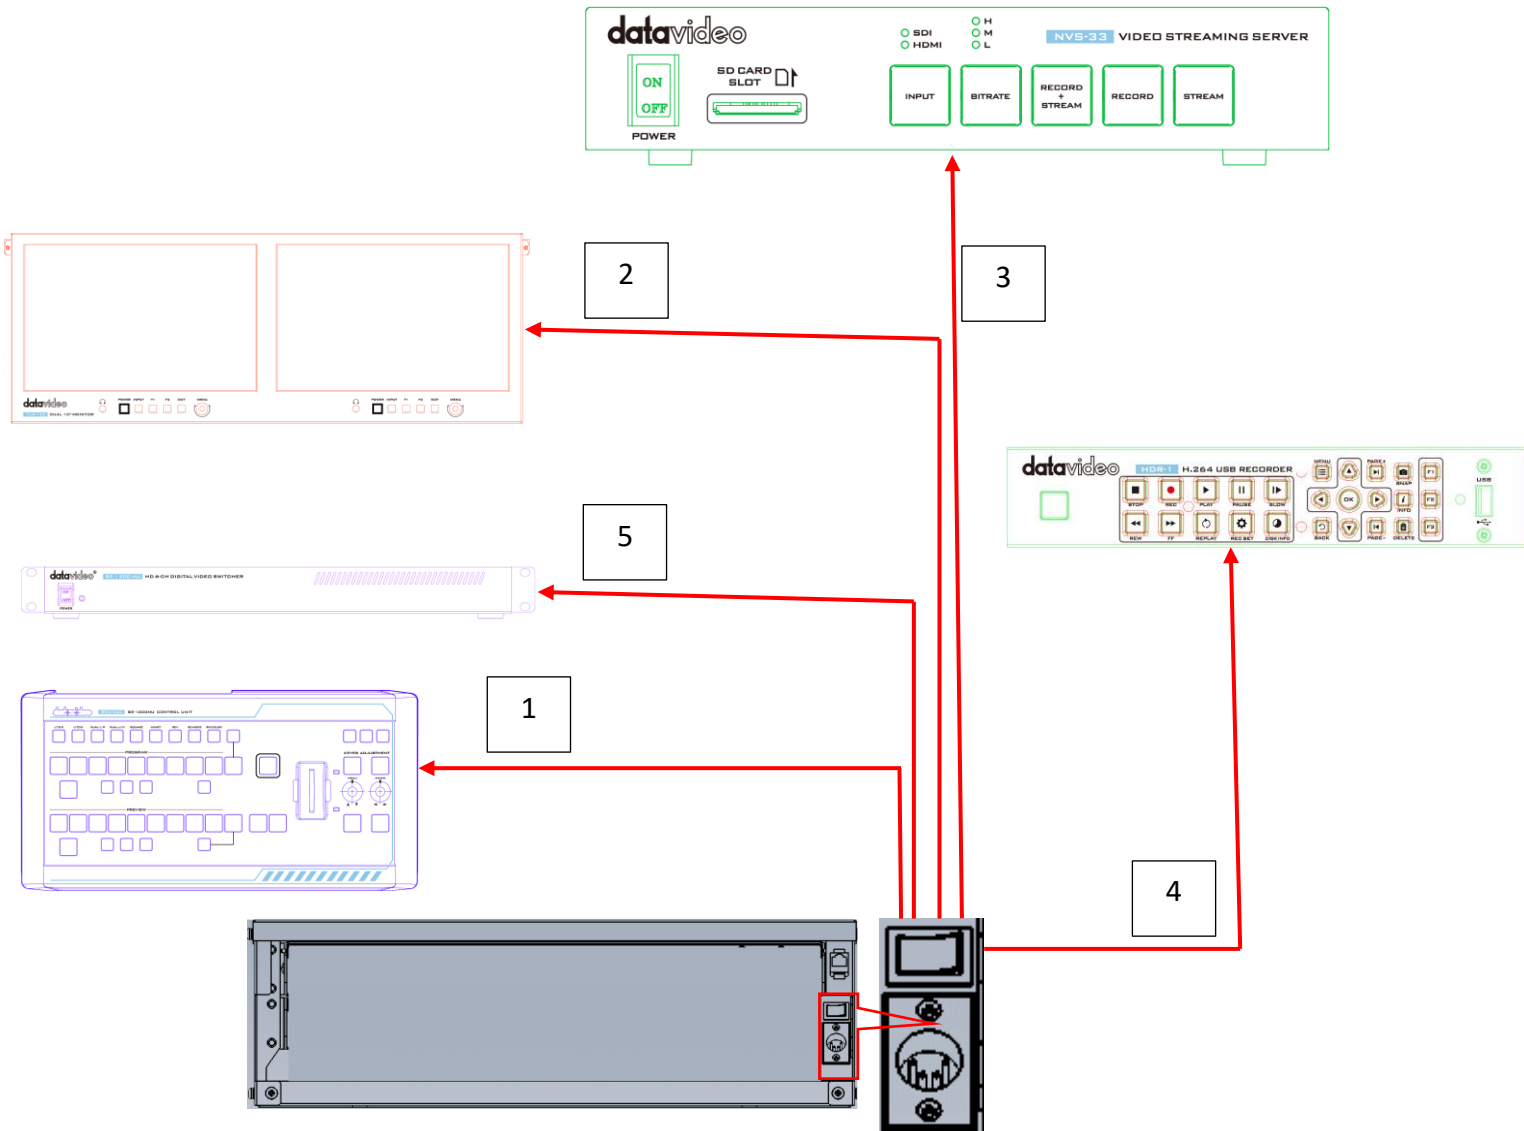

8. Please connect an RS-232 9 pin cable (male to male) from the RS-232 interface on the rear panel of the RMC-260 to the RS-232 interface on the rear panel of the SE-1200MU.

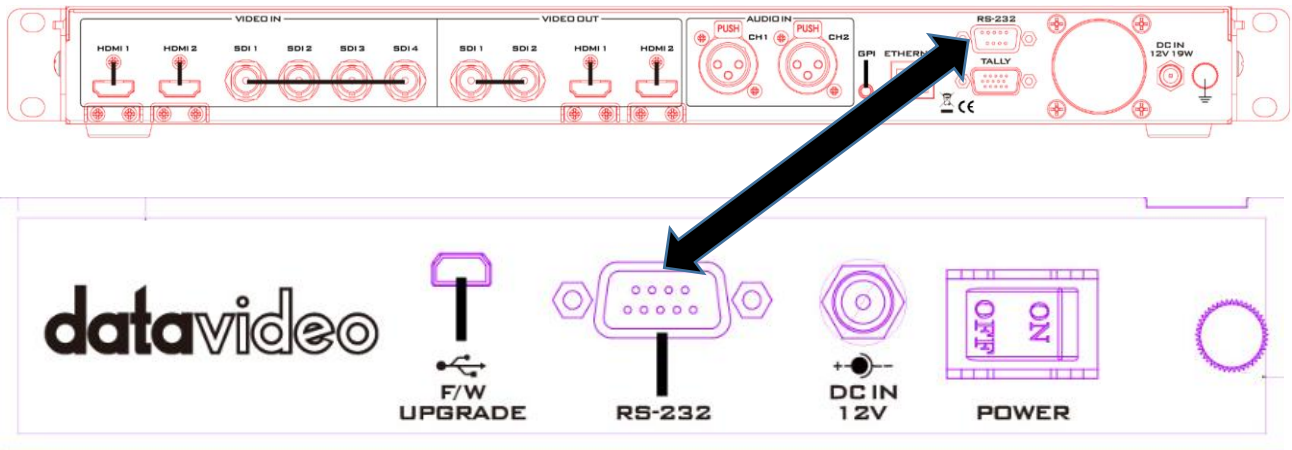

Powering On

Each product built into the GO 1200 Studio receives DC power from the power connection on the rear of the RMK-6 unit of the GO 1200 Studio.

Please ensure the RMK-6 is fed with a DC power supply before attempting to switch on the GO 1200 Studio.

If a product within the GO 1200 Studio fails to start after the power switch on the rear of the RMK-6 is switched on please locate the on/off switch for that product which has not yet started. .

For further advice on using a product within the GO 1200 Studio please refer to the related manual.

Powering Off




Before powering off the GO 1200 Studio via the power switch on the rear of the RMK-6 please ensure that two sets of the HDR-1 have been stopped.

Packing Away

Carefully fold the 10.1" TLM-102 monitor to its horizontal 1U shipping position. Please remember to secure its position so it cannot move when in transit.

Now return the GO 1200 Studio to the HC-800 case and the product is ready to be moved.

Dimensions

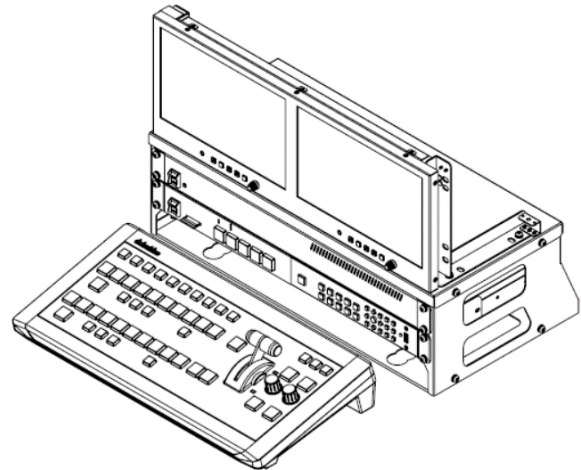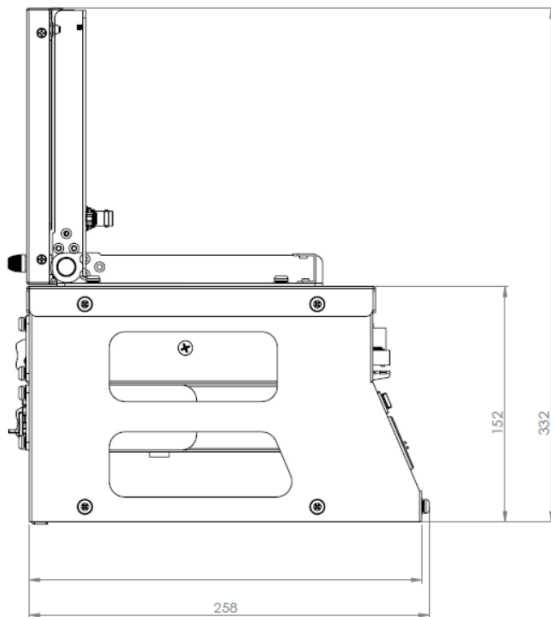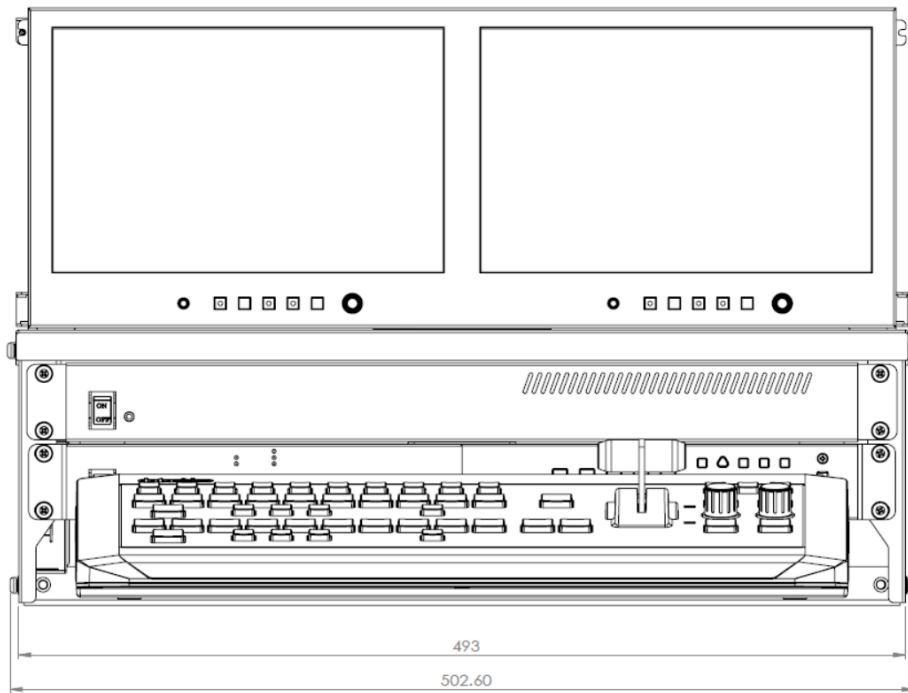

All dimensions in mm.

Weights

The GO 1200 Studio is heavy and the weight is about 22kg. If you want to move the GO 1200 Studio from the carton, it needs two people. If the GO 1200 Studio is packed in the 19" flight case, it needs one person only to move the GO 1200 Studio.

A minimum of two people are required to lift or move this product. There are two carry handles on either side of the product, please use these handles to safely share the weight between the people lifting the unit.

Always use a trolley to safely transport the GO 1200 Studio over distances of 2 Metres or more.

The unit should be always moved and placed in an upright position; do not place or try to move the unit in any other way as damage or injury could result.

Place the GO 1200 Studio on a strong, stable, flat surface that is capable of supporting the weight. Do not use a folding or single leg table to support the GO 1200 Studio.

Specifications

The GO 1200 Studio is a combination of Datavideo products, for the specifications of a particular product please refer to its related manual.。

Device	Model
Switcher	SE-1200 MU
H.264 USB Recorder	HDR-1
Video Streaming Server	NVS-33
SE-1200 MU Remote Controller	RMC-260
Monitor	TLM-102
Rack Mount Frame	RMK-6

Note

Note

Note

Service & Support

It is our goal to make owning and using Datavideo products a satisfying experience. Our support staff is available to assist you to set up and operate your system. Contact your local office for specific support requests. Plus, please visit www.datavideo.com to access our FAQ section.



Please visit our website for latest manual update.

<https://www.datavideo.com/product/GO%201200%20Studio>

datavideo
www.datavideo.com



@DatavideoUSA @DatavideoIndia2016
@DatavideoEMEA @Datavideojapan
@DatavideoTaiwan @DatavideoLatam
@DatavideoAsia @DatavideoBrasil



@Datavideo
@Datavideo_EMEA
@Datavideo_Taiwan



@DatavideoUSA
@DVTWDCN



@DatavideoUSA
@DatavideoEurope

All the trademarks are the properties of their respective owners.
Datavideo Technologies Co., Ltd. All rights reserved 2020

G082060865E1
Dec.-30.2019
Version V1