




Mistral 6 PR-B

All-Weather Speaker System Two-Way and Passive Radiator

ITA

Specifiche tecniche

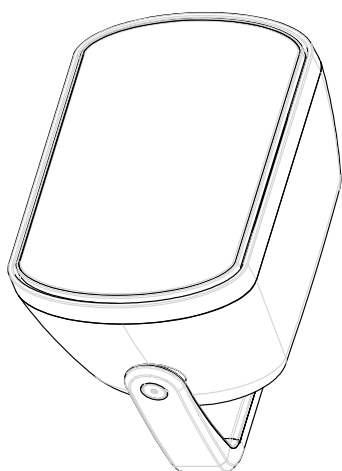

Drivers	Tweeter 1" (25 mm) silk soft dome Woofer 6.5" (165mm) graphite cone with rubber surround
Cabinet type	Sealed with front passive radiator
Frequency response	100Hz-20kHz
Sensitivity	88 dB 1 watt / 1 metre
Rated power	8.75-17.5-35-70W @ 100V 120W program, 70W RMS @ 8Ω
Impedance	8 ohms nominal
Protection rate	IP66 waterproof speaker
Input connector	Quick-connect terminal
Dimensions (HxWxD) / Weight	304x211x198mm / 4.10kg
Cabinet Material	ABS
Accessories	Wall mount bracket / special screw (included)

Avvertenze di sicurezza

Attenzione: tensione pericolosa.

Accendere l'amplificatore solo dopo aver completato e verificato l'installazione, i diffusori devono essere collegati all'amplificatore per ultimi.

La potenza e l'impedenza del diffusore Mistral 6 PR-B sono determinate dalla posizione del selettore posteriore.


La potenza può variare da 8.75W a 70W a 100V e 70W a 8Ω, a seconda della posizione del selettore.

Con settaggio a 100V è necessario assicurarsi che la somma delle potenze di tutti i diffusori collegati all'amplificatore non superi la potenza massima erogabile dall'amplificatore stesso.

Mistral 6 PR-B può inoltre essere utilizzato a bassa impedenza (8Ω) e quindi collegato a un amplificatore audio tradizionale.



Disegno tecnico

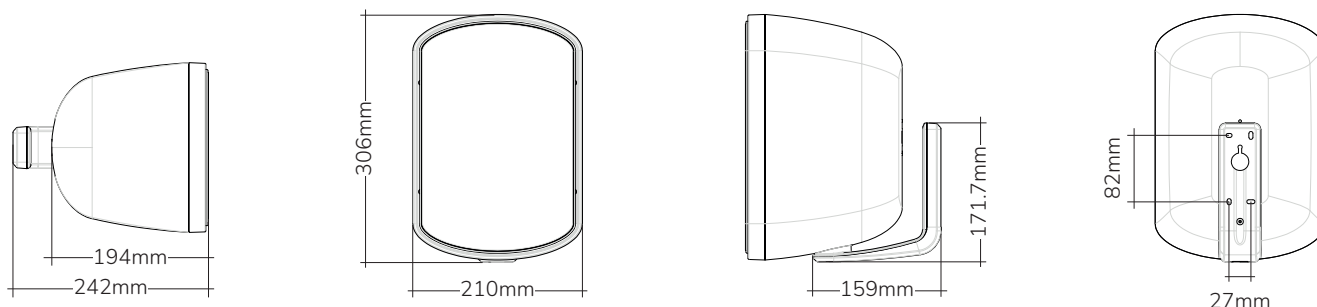




Mistral 6 PR-B

All-Weather Speaker System Two-Way and Passive Radiator

ENG

Technical specifications

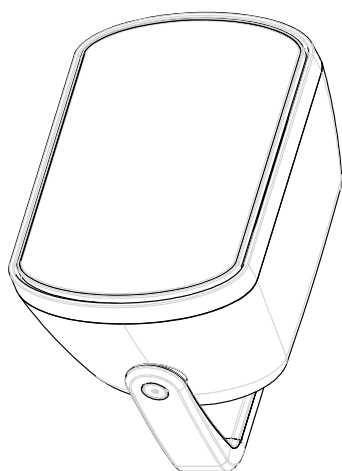

Drivers	Tweeter 1" (25 mm) silk soft dome Woofer 6.5" (165mm) graphite cone with rubber surround
Cabinet type	Sealed with front passive radiator
Frequency response	100Hz-20kHz
Sensitivity	88 dB 1 watt / 1 metre
Rated power	8.75-17.5-35-70W @ 100V 120W program, 70W RMS @ 8Ω
Impedance	8 ohms nominal
Protection rate	IP66 waterproof speaker
Input connector	Quick-connect terminal
Dimensions (HxWxD) / Weight	304x211x198mm / 4.10kg
Cabinet Material	ABS
Accessories	Wall mount bracket / special screw (included)

Safety warnings

Warning: hazardous voltage.

Switch on the amplifier only after the installation has been completed and checked, loudspeakers must be connected to the amplifier last.

The power rating and impedance of the Mistral 6 PR-B loudspeaker are determined by the position of the selector located on the connection terminal.

The power rating can range from 8.75W to 70W at 100V and 70W at 8Ω, depending on the selector position. When set to 100V, it is necessary to ensure that the sum of the power ratings of all loudspeakers connected to the amplifier does not exceed the maximum output power of the amplifier.

Mistral 6 PR-B can also be used in low-impedance mode (8Ω) and therefore connected to a conventional audio amplifier.



Technical drawing

