

Q16pro



User Manual

RGBlink[®]

Article No: RGB-RD-UM-Q16pro E000
Revision No: V1.0

Content

<i>Declarations</i>	2
FCC/Warranty	2
Operators Safety Summary	3
Installation Safety Summary	3
<i>Chapter 1 Your Product</i>	5
1.1 In the Box	5
1.2 Product Overview	6
1.2.1 Rear Panel	7
1.2.2 Front Panel	8
1.2.3 Dimension	9
<i>Chapter 2 Install Your Product</i>	10
2.1 Plug in Signals	10
2.2 Plug in Main Power	10
2.3 Turn on Your Product	10
<i>Chapter 3 Use Your Product</i>	11
3.1 Use the Menu Button	11
3.2 Menu Structure	11
3.3 Use the Menu	12
3.3.1 Presentation	12
3.3.2 Split	14
3.3.3 Advanced	16
3.3.4 System	18
3.3.5 Scene Management	19
3.4 Button	20
3.5 XPOSE 2.0	20
<i>Chapter 4 Order Codes</i>	22
4.1 Product Codes	22
4.2 Module Codes	22
4.2.1 Input Modules	22
4.2.2 Output Modules	22
<i>Chapter 5 Support</i>	23
5.1 Contact US	23
<i>Chapter 6 Appendix</i>	24
6.1 Specification	24
6.2 Terms & Definitions	25
6.3 Revision History	31

Thank you for choosing our product!

This User Manual is designed to show you how to use this video processor quickly and make use of all the features. Please read all directions and instructions carefully before using this product.

Declarations

FCC/Warranty

Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area may cause harmful interference, in which case the user will be responsible for correcting any interference.

Guarantee and Compensation

RGBlink provides a guarantee relating to perfect manufacturing as part of the legally stipulated terms of guarantee. On receipt, the purchaser must immediately inspect all delivered goods for damage incurred during transport, as well as for material and manufacturing faults. RGBlink must be informed immediately in writing of any complains.

The period of guarantee begins on the date of transfer of risks, in the case of special systems and software on the date of commissioning, at latest 30 days after the transfer of risks. In the event of justified notice of compliant, RGBlink can repair the fault or provide a replacement at its own discretion within an appropriate period. If this measure proves to be impossible or unsuccessful, the purchaser can demand a reduction in the purchase price or cancellation of the contract. All other claims, in particular those relating to compensation for direct or indirect damage, and also damage attributed to the operation of software as well as to other service provided by RGBlink, being a component of the system or independent service, will be deemed invalid provided the damage is not proven to be attributed to the absence of properties guaranteed in writing or due to the intent or gross negligence or part of RGBlink.

If the purchaser or a third party carries out modifications or repairs on goods delivered by RGBlink, or if the goods are handled incorrectly, in particular if the systems are commissioned operated incorrectly or if, after the transfer of risks, the goods are subject to influences not agreed upon in the contract, all guarantee claims of the purchaser will be rendered invalid. Not included in the guarantee coverage are system failures which are attributed to programs or special electronic circuitry provided by the purchaser, e.g. interfaces. Normal wear as well as normal maintenance are not subject to the guarantee provided by RGBlink either.

The environmental conditions as well as the servicing and maintenance regulations specified in this manual must be complied with by the customer.

Operators Safety Summary

The general safety information in this summary is for operating personnel.

Do Not Remove Covers or Panels

There are no user-serviceable parts within the unit. Removal of the top cover will expose dangerous voltages. To avoid personal injury, do not remove the top cover. Do not operate the unit without the cover installed.

Power Source

This product is intended to operate from a power source that will not apply more than 230 volts rms between the supply conductors or between both supply conductor and ground. A protective ground connection by way of grounding conductor in the power cord is essential for safe operation.

Grounding the Product

This product is grounded through the grounding conductor of the power cord. To avoid electrical shock, plug the power cord into a properly wired receptacle before connecting to the product input or output terminals. A protective-ground connection by way of the grounding conductor in the power cord is essential for safe operation.

Use the Proper Power Cord

Use only the power cord and connector specified for your product. Use only a power cord that is in good condition. Refer cord and connector changes to qualified service personnel.

Use the Proper Fuse

To avoid fire hazard, use only the fuse having identical type, voltage rating, and current rating characteristics. Refer fuse replacement to qualified service personnel.

Do Not Operate in Explosive Atmospheres

To avoid explosion, do not operate this product in an explosive atmosphere.

Installation Safety Summary

Safety Precautions

For all device installation procedures, please observe the following important safety and handling rules to avoid damage to yourself and the equipment.

To protect users from electric shock, ensure that the chassis connects to earth via the ground wire provided in the AC power Cord.

The AC Socket-outlet should be installed near the equipment and be easily accessible.

Unpacking and Inspection

Before opening device shipping box, inspect it for damage. If you find any damage, notify the shipping carrier immediately for all claims adjustments. As you open the box, compare its contents against the packing slip. If you find any shortages, contact your sales representative.

Once you have removed all the components from their packaging and checked that all the listed components are present, visually inspect the system to ensure there was no damage during shipping. If there is damage, notify the shipping carrier immediately for all claims adjustments.

Site Preparation

The environment in which you install your device should be clean, properly lit, free from static, and have adequate power, ventilation, and space for all components.

Chapter 1 Your Product

1.1 In the Box

**1x AC Power
Cord**



2 x HDMI Cable



**1 x Network
Cable**



**1 x DB9-RJ11
Cable**



**1 x Anti-static
Bag**



1 x USB Disk



Note: AC Power Cable supplied as standard according to destination market.
Upgrading tool package and user manual are stored in the U disk, please keep it.

1.2 Product Overview

Q16pro edition supports up to 8 inputs, including HDMI 1.3, SD/HD/3G SDI (to be published), HDMI2.0, H.264/265 for 2K and 4K signals. The standard unit comes with 4 HDMI 1.3 outputs and builds with local front control panel and remote control interfaces with RS 232 and ethernet ports. Q16pro is available to be remote controlled by XPOSE or 3rd party APP / controller by open API.


Q16pro combine rugged design, class-leading video processing and image quality, ultra-low latency, versatile 4K connectivity, live streaming capabilities, and unmatched ease of use to meet the requirement of the modern commercial display systems application, including live corporate meetings, hybrid events, worship productions, or large-scale LED video wall installations.

Its outputs supports up to 4 independent displays, and 8 layers with arbitrary roaming capacity and each layer can cross over each output without layer counting up.



Q16pro System Connection Diagram



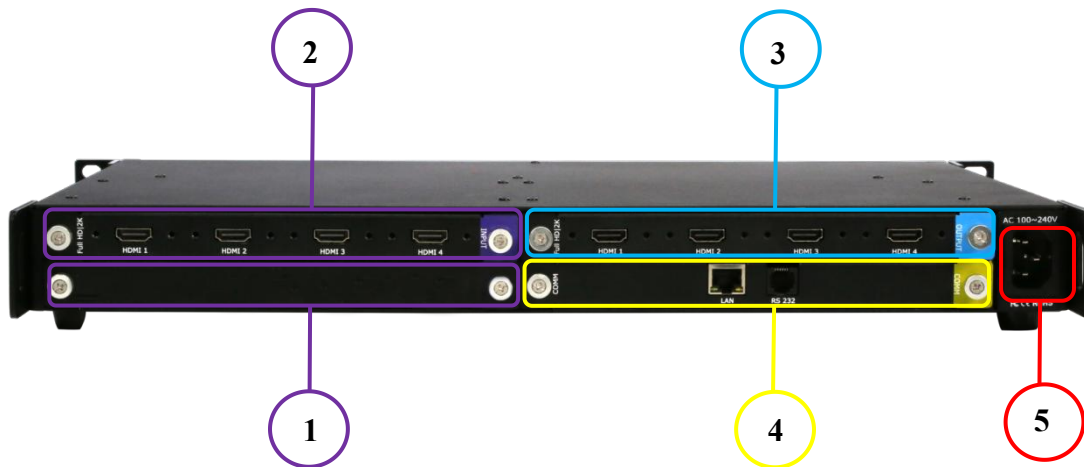










1.2.1 Rear Panel



Input Connectors	
1	Optional slots
2	Standard: 4×HDMI-IN, resolutions up to 1920*1080@60, support EDID
Output Connectors	
3	Standard: 4×HDMI-OUT, resolutions up to 1920*1080@60, support EDID
Control Connectors	
4	LAN RJ45 / RS232 RJ11 Use for system upgrade and remote control via APP
Power Socket	
5	1×IEC power socket

1.2.2 Front Panel




Button Instruction			
	MENU and EXIT		SAVE SCENE
	Adjust size and position of layers		Enter SPLIT menu
	LOAD SCENE		Enter Layout Select menu
 	IN1-IN8 input signal selection buttons and 1, 2, 3, 4, 6, 7, 8, 9 digital button	 	Layer 1-8 and 0, 5 digital button
	Sleep Button		LCD Panel. Display current status of the product, and for feature selections, provides interactive choices in conjunction with buttons on the front panel.
	Confirm by pushing, selecting items by rotating		

1.2.3 Dimension

Following is the dimension of Q16pro for your reference:

Dimension: 490mm x 343mm x 55mm

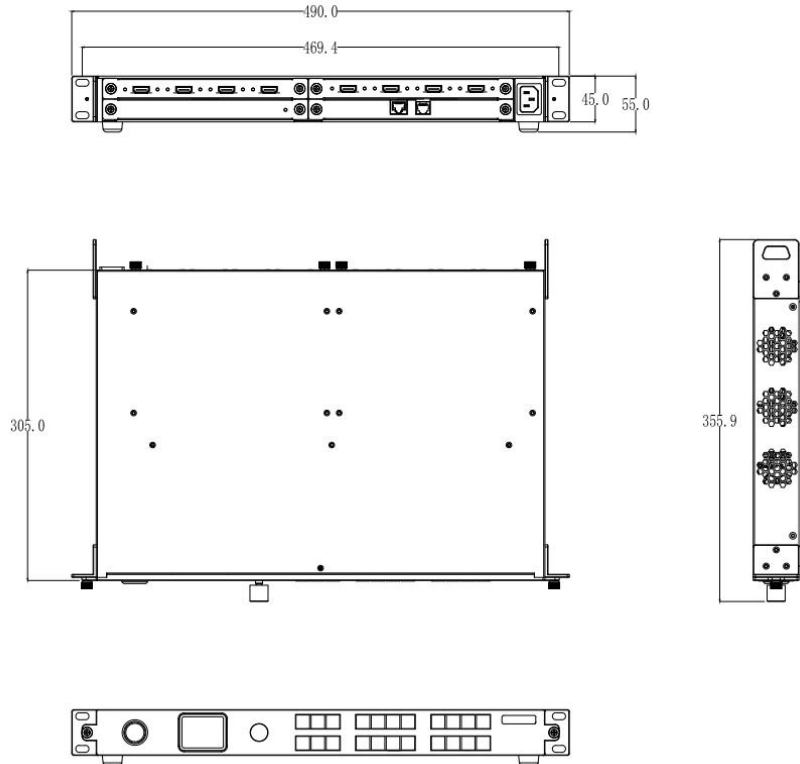

Chapter 2 Install Your Product

2.1 Plug in Signals

Connect signals to the product (ensure all devices are powered off first). Tighten connector screws/locks where provided.

2.2 Plug in Main Power

Connect IEC cable to device and plug into wall socket. Turn on power at wall socket.

2.3 Turn on Your Product

After the device is boot up, the screen shows as below, meanwhile the screen will show its input and output state and IP address.



Chapter 3 Use Your Product

3.1 Use the Menu Button

Push **【MENU】** button to enter main menu.

Turn the knob to select corresponding menu item. Push **【MENU】** button to return back to the previous menu.

The symbol >> indicate that the next item is available. The symbol > indicate that the item is selected.

Push the knob to confirm the operation. The symbol * means the selected item is under editing state, ready to be set or checked.



3.2 Menu Structure

The MENU structure includes Presentation, Split, Advanced, System and Scene Manage, shown in the figure below.

Presentation	
Output Resolution	>>
Image Select	>>

Split	
Output Resolution	>>
Split Mode	>>

Advanced	
4KInput Mode	>>
EDID	>>
Input Adjustment	>>
Output Adjustment	>>
Device Encryption	>>
Synchronize	

System	
SN	ffff
BG/Black Key	BG
Software Version	>>
Network Setting	>>
Fan Speed	>>
Language语言	ENG
Factory Reset	


Scene Manage	
Fade Time	1.0 S
Save To	>>
Load From	>>

3.3 Use the Menu

Use the menu system for convenient and intuitive operation. The Screen shows the menu items. The screen will show the default state when the menu is not in use, or the operation has timed out. Using the **【MENU】** button and rotary knob in the front panel, the screen will show the corresponding menus according to user selections.


3.3.1 Presentation

After the device is boot up, push MENU, rotate the knob and select <Presentation>.

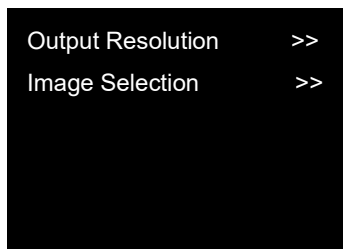


Output Resolution

In Output Resolution interface, users can choose Standard resolution or Custom resolution.

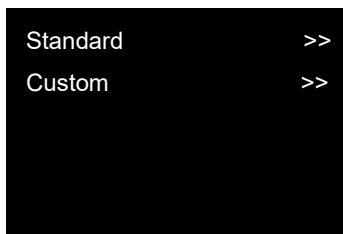

Standard: Push the knob for output resolution selection. The symbol * in front of the resolution indicates that this item can be edited. Then rotate the knob to choose standard resolution.

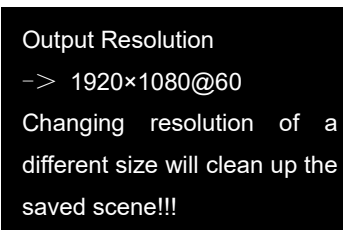

Custom: Push the button to custom output resolution. The symbol * in front of the resolution indicates that this item can be edited and the 1~9 numeric key will light up at the same time. Users can use the numeric keys to input the width, height and frame rate one by one.

```

Custom
-> 1024x768@60
Changing resolution of a
different size will clean up the
saved scene!
  
```

Image Select

Image Layout	>>	H Pos	0
Image Select	L1	V Pos	0
Source	1 DVI	Crop	>>
Width	1920	Reset Parameters	
Height	1080		

Image Layout: Select the image layout for presentation mode. There are 15 layout patterns built-in as follows:

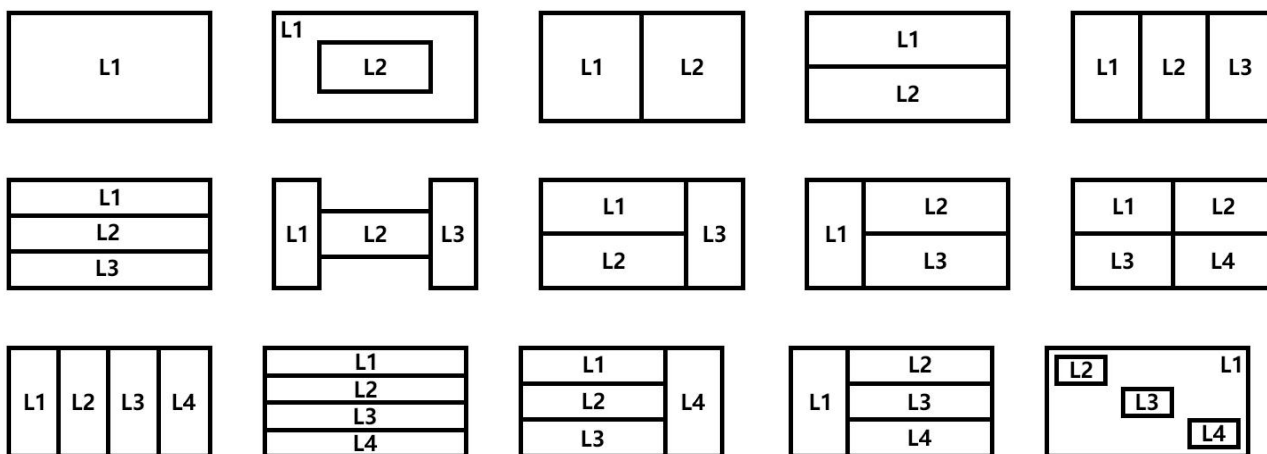


Image Select: L1-L8 Layer optional.

Source: Input signal selection.


Width, Height, H Pos, V Pos: Set size and position for image.

Crop: To edit width, height, H Pos, V Pos for different layers.

Reset: Cancel above settings.

3.3.2 Split


Push MENU, rotate the knob and select <Split>.

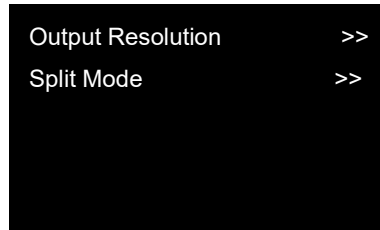

Output Resolution

The same operation as shown in last part.














Split Mode

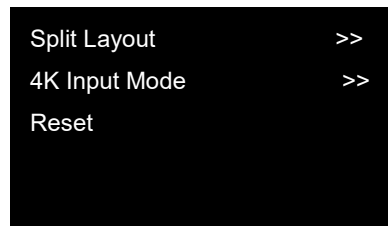

Split Layout

There are 6 background split mode available and each basic split mode comes with useful multi-picture layout.

Split Mode	Background	Multi-Picture Layout
Cross		
H 1/2		

V 1/2				
H 1/3				
H 1/4				
V 1/4				

4K Input Mode

The available modes for 4K input module: 2K×1K, 4K×1K, 4K×2K

The chosen mode will be valid on all ports.



4K Input Mode
Input Source 1
Input Source 2
Save Setting

Input Source 1: Select one from HDMI 2.0,DP 1.2 in 4K×2K

Input Source 2: Select two from HDMI 2.0,DP 1.2 in 4K×1K


Save Setting to confirm.

Reset

Cancel above settings.

3.3.3 Advanced


Push MENU, rotate the knob and select <Advanced>.

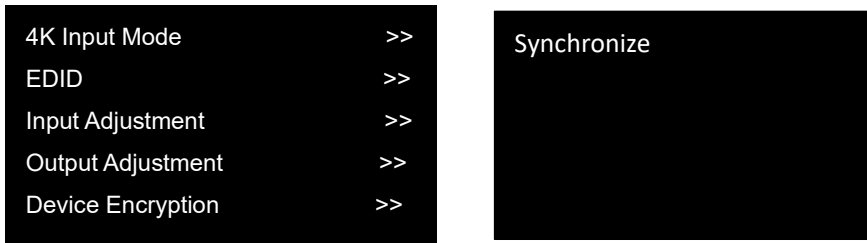

4K Input Mode

The same operation as shown in Split.

EDID

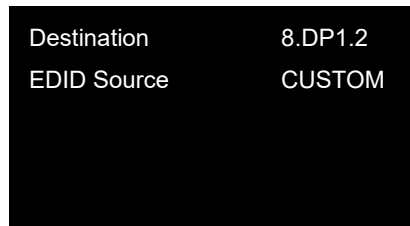

Destination: 1~8 Input Port

EDID Source: RGBDVI, RGBHDMI

CUSTOM or RESET optional. Choose CUSTOM to custom EDID or choose RESET to reset EDID.

After successful setting, the interface will pop up a reminder “ Copy EDID Success. Please reset layer. ”

Input Adjustment

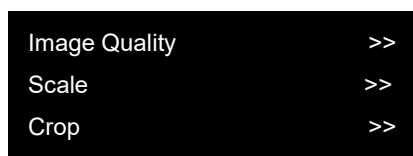


Image Quality: Input Signal 1-4: Adjust brightness, contrast and color saturation, sharpness and temperature of each input source port.

DVI Mode
 Brightness
 Contrast
 Color Saturation
 Sharpness

Color Red
 Color Green
 Color Blue
 Save
 Reset

Input 4K signal:

Brightness
 Contrast
 Color Default Mode
 Color Red
 Color Green

Color Blue
 Save
 Reset

Scale

Scale: adjust each input source by scale.

Input Signal	3 HDMI 2.0
Width	0
Height	0
H Pos	0
V Pos	0
Save	
Reset	

Crop

Crop: adjust each input source by crop.

Input Signal	8 DVI
Width	0
Height	0
H Pos	0
V Pos	0
Save	
Reset	


Output Adjustment

Output Type	>>
Output Exchange	>>

Output Type:


Output Connectors: 1/2/3/4/5/6/7/8 DVI Module (DVI/HDMI)

Output Exchange:

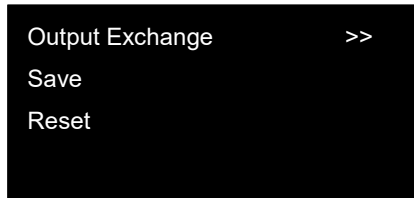

Device Encryption

Q16pro supports device encryption. The password defaults to 20090721. Users can use numeric keys to enter password. Users should firstly key in default password to enter the following interface.

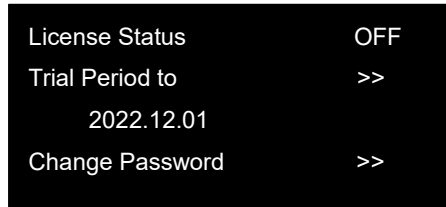

License Status: ON/OFF. If the License Status is turned on, user can set the Trial Period. If the time exceeds this date, the device will be locked. If the License Status is turned off, there is no need to set the Trial Date, that is, user can use the device with no limit time.

Change Password: Click >> and use numeric keys to enter password.

3.3.4 System

Push MENU, rotate the knob and select <System>.



SN: to check serial number of the device.

BG/Black Key: If you choose BG, you can choose to display background or not to display background.

If choose BLACK Key, pushing this button will black out selected layer.

Software Version: check comm board version, input module version and output module version.

Network Setting: Mac address and DHCP ON/OFF, IP Address, Subnet Mask, Gateway setting take effect after the device is rebooted.


Fan Speed: Adjust the speed via button. Users can also turn on Auto Control for automatic adjustment of fan speed.

Language 语言: Users can switch language here. English or Chinese available.

Factory Reset: If Factory Reset is selected, the interface will show warning, confirm by pushing knob, cancel by pushing any other key.


3.3.5 Scene Management

Push MENU, rotate the knob and select <Scene Management>.

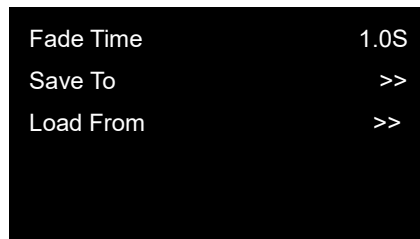


Fade Time: 0.1S~10.0S. Set fade in fade out time for scene switching by rotating knob.

Save To: Save the scene to SCENE 1-16.

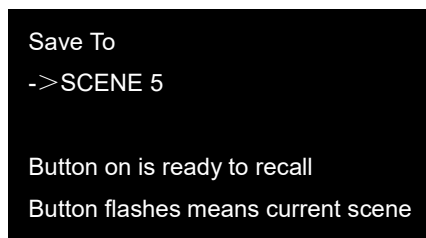

Load From

Load saved scene from SCENE 1-16.

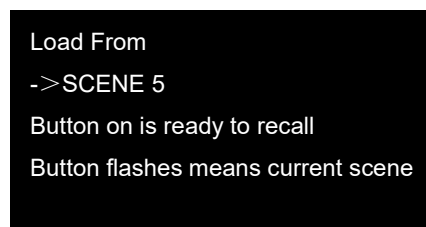

3.4 Button

MENU

To enter Menu or Exit.

SAVE

Short cut button to SAVE scene to SECEN 1-16 by pushing number buttons.

SCALE

Button for size and position adjustment of layers.

SPLIT

Short cut buttons to enter Split Mode menu.

LOAD

Short cut button to Load saved scene from SECEN 1-16 by pushing number buttons.

LAYOUT

Button to enter Presentation Mode Layout Select menu or Split Mode Layout Select according to the current mode.

IN1/IN2/IN3/IN4/IN5/IN6/IN7/IN8

Select input source 1~8, when the source is selected, the button will flash. Can also be used as 1, 2, 3, 4, 6, 7, 8, 9 numerical keys,

L1/L2/L3/L4/L5/L6/L7/L8

Layer selection after background is set. When the layer is select the button will flash. If there the layout chosen previously is without PIP or less PIP than 4, users can push the unlighted Layer button to open up more PIP. L1 and L5 can also be used as 5, 0 digital button respectively.

3.5 XPOSE 2.0

Physically Connect Device to Computer

Use RJ11-DB9 serial cable to connect RS232 port of device and computer, or use CAT5/6 cable to connect LAN port of device and computer, or connect both device and computer to the same router.

XPOSE 2.0 Operation

Download XPOSE 2.0 software from RGBlink website.

https://www.rgblink.com/xpose_software.aspx

Please refer to user manual of XPOSE 2.0 for how to install and operate XPOSE 2.0

https://www.rgblink.com/resource_type.aspx?pro_id=67

Chapter 4 Order Codes

4.1 Product Codes

Order Codes	Description
712-0004-05-0	Q16pro 1U, 2K Standard: 1 x Host (with Communication Module), 1 × HDMI 1.3 Input Module, 1 × HDMI 1.3 Output Module
712-0004-05-1	Q16pro 1U, 1 x Host (with Communication Module)

4.2 Module Codes

4.2.1 Input Modules

Order Codes	Description
790-1004-01-0	Quad HDMI 1.3 Input Module
790-1004-02-0	HDMI 2.0 & DP 1.2 4K@60 Input Module
790-1004-04-0	Quad 3G SDI Input Module (to be published)

4.2.2 Output Modules

Order Codes	Description
790-1004-21-0	Dual DP 1.2 Output Module
790-1004-22-0	Quad HDMI 1.3 Output Module

Chapter 5 Support

5.1 Contact US

www.rgblink.com



Inquiries

+86-592-577-1197
info@rgblink.com
rgblink.com/contact-us

Global Support

support@rgblink.com
rgblink.com/support-me



@RGLINK



/rgblink



+rgblink



/rgblink



rgblink



rgblink

RGblink Headquarters

Xiamen, China

Room 601A, No. 37-3
Banshang community,
Building 3, Xinke Plaza, Torch
Hi-Tech Industrial
Development Zone, Xiamen,
China

+86-592-577-1197

China Regional Sales & Support

Shenzhen, China

11th Floor Baiwang Building
5318 Shahe West Road
Baimang, Nanshan

+86-755 2153 5149

Beijing Region Office

Beijing, China

Building 8, 25 Qixiao Road
Shahe Town Changping

+010- 8577 7286

Europe Regional Sales & Support






Eindhoven, Holland

Flight Forum Eindhoven
5657 DW

+31 (040) 202 71 83

Chapter 6 Appendix

6.1 Specification

Quad HDMI1.3 Input Module	
Connector Appearance	
Numbers of Input	4
Connector Type	HDMI-A
Supported Standard	HDMI 1.3
Input Resolution	800×600@60 ~ 1920×1200@60
DP 1.2/HDMI 2.0 4K@60 Input Module	
Connector Appearance	
Numbers of Input	4
Connector Type	2×HDMI-A 2×DisplayPort
Supported Standard	HDMI 2.0 DP1.2
Input Resolution	800×600@60~3840×2160@60
Quad 3G-SDI Input Module with Loop Out	
Connector Appearance	
Numbers of Input	8
Connector Type	8×BNC (4 In 4 Loop)
Supported Standard	3G SDI
Input Resolution	480i 576i 720p@50/60 1080i@59.94/60 1080p@50/59.94/60
Dual DP 1.2 Output Module	
Connector Appearance	
Numbers of Output	2
Connector Type	2×DisplayPort
Supported Standard	DP 1.2
Output Resolution	800×600@60~3840×2160@60
Quad HDMI 1.3 Output Module	
Connector Appearance	
Numbers of Output	4
Connector Type	4×HDMI-A
Supported Standard	HDMI 1.3
Output Resolution	800×600@60~2048×1150@60

Extras	
Communication	LAN RS232 1×RJ45 1×RJ11
Power Supply	AC 85-264V, 50/60Hz
Max Power	65W
Working Temperature	-5°C -45°C
Working Humidity	10% –85 % RH
Net Dimensions	490mm x 343mm x 55mm
Product Warranty	3 years parts and labor warranty

6.2 Terms & Definitions

- **RCA**: Connector used primarily in consumer AV equipment for both audio and video. The RCA connector was developed by the Radio Corporation of America.
- **BNC**: Stands for Bayonet Neill-Concelman. A cable connector used extensively in television (named for its inventors). A cylindrical bayonet connector that operates with a twist-locking motion .
- **CVBS**: CVBS or Composite video, is an analog video signal without audio. Most commonly CVBS is used for transmission of standard definition signals. In consumer applications the connector is typically RCA type, while in professional applications the connector is BNC type.
- **YPbPr**: Used to describe the colour space for progressive-scan. Otherwise known as component video.
- **VGA** : Video Graphics Array. VGA is an analog signal typically used on earlier computers. The signal is non-interlaced in modes 1, 2, and 3 and interlaced when using in mode
- **DVI** : Digital Visual Interface. The digital video connectivity standard that was developed by DDWG (Digital Display Work Group). This connection standard offers two different connectors: one with 24 pins that handles digital video signals only, and one with 29 pins that handles both digital and analog video.
- **SDI** : Serial Digital Interface. Standard definition video is carried on this 270 Mbps data transfer rate. Video pixels are characterized with a 10-bit depth and 4:2:2 color quantization. Ancillary data is included on this interface and typically includes audio or other metadata. Up to sixteen audio channels can be transmitted. Audio is organised into blocks of 4 stereo pairs. Connector is BNC.
- **HD-SDI**: high-definition serial digital interface (HD-SDI), is standardized in SMPTE 292M this provides a nominal data rate of 1.485 Gbit/s.
- **3G-SDI**: standardized in SMPTE 424M, consists of a single 2.970 Gbit/s serial link that allows replacing dual

link HD-SDI.

- **6G-SDI:** standardized in SMPTE ST-2081 released in 2015, 6Gbit/s bitrate and able to support 2160p@30.
- **12G-SDI:** standardized in SMPTE ST-2082 released in 2015, 12Gbit/s bitrate and able to support 2160p@60.
- **U-SDI:** Technology for transmitting large-volume 8K signals over a single cable. a signal interface called the ultra high definition signal/data interface (U-SDI) for transmitting 4K and 8K signals using a single optical cable. The interface was standardized as the SMPTE ST 2036-4.
- **HDMI:** High Definition Multimedia Interface: An interface used for the transmission of uncompressed high definition video, up to 8 channels of audio, and control signals, over a single cable.
- **HDMI 1.3:** released on June 22 2006, and increased the maximum TMDS clock to 340 MHz (10.2 Gbit/s). Support resolution 1920 × 1080 at 120 Hz or 2560 × 1440 at 60 Hz). It added support for 10 bpc, 12 bpc, and 16 bpc color depth (30, 36, and 48 bit/px), called deep color.
- **HDMI 1.4 :** released on June 5, 2009, added support for 4096 × 2160 at 24 Hz, 3840 × 2160 at 24, 25, and 30 Hz, and 1920 × 1080 at 120 Hz. Compared to HDMI 1.3, 3 more features added which are HDMI Ethernet Channel (HEC) , audio return channel (ARC), 3D Over HDMI, a new Micro HDMI Connector, an expanded set of color spaces.
- **HDMI 2.0,** released on September 4, 2013 increases the maximum bandwidth to 18.0 Gbit/s. Other features of HDMI 2.0 include up to 32 audio channels, up to 1536 kHz audio sample frequency, the HE-AAC and DRA audio standards, improved 3D capability, and additional CEC functions.
- **HDMI 2.0a:** was released on April 8, 2015, and added support for High Dynamic Range (HDR) video with static metadata.
- **HDMI 2.0b:** was released March, 2016, support for HDR Video transport and extends the static metadata signaling to include Hybrid Log-Gamma (HLG).
- **HDMI 2.1 :** released on November 28, 2017. It adds support for higher resolutions and higher refresh rates, Dynamic HDR including 4K 120 Hz and 8K 120 Hz.
- **DisplayPort:** A VESA standard interface primarily for video, but also for audio, USB and other data. DisplayPort (or DP) is backwards compatible with HDMI, DVI and VGA.
- **DP 1.1:** was ratified on 2 April 2007, and version 1.1a was ratified on 11 January 2008. DisplayPort 1.1 allow a maximum bandwidth of 10.8 Gbit/s (8.64 Gbit/s data rate) over a standard 4-lane main link, enough to support 1920x1080@60Hz
- **DP 1.2:** introduced on 7 January 2010, effective bandwidth to 17.28 Gbit/s support increased resolutions, higher refresh rates, and greater color depth, maximum resolution 3840 × 2160@60Hz
- **DP 1.4:** publish on 1 Mar, 2016. overall transmission bandwidth 32.4 Gbit/s , DisplayPort 1.4 adds support for

Display Stream Compression 1.2 (DSC), DSC is a "visually lossless" encoding technique with up to a 3:1 compression ratio. Using DSC with HBR3 transmission rates, DisplayPort 1.4 can support 8K UHD (7680 × 4320) at 60 Hz or 4K UHD (3840 × 2160) at 120 Hz with 30 bit/px RGB color and HDR. 4K at 60 Hz 30 bit/px RGB/HDR can be achieved without the need for DSC.

- **Multi-mode Fiber:** Fibers that support many propagation paths or transverse modes are called multi-mode fibers, generally have a wider core diameter and are used for short-distance communication links and for applications where high power must be transmitted.

- **Single-mode Fiber:** Fiber that support a single mode are called single-mode fibers. Single-mode fibers are used for most communication links longer than 1,000 meters (3,300 ft).

- **SFP :** small form-factor pluggable , is a compact, hot-pluggable network interface module used for both telecommunication and data communications applications.

- **optical fiber connector:** terminates the end of an optical fiber, and enables quicker connection and disconnection than splicing. The connectors mechanically couple and align the cores of fibers so light can pass. 4 most common types of optical fiber connectors are SC, FC, LC,ST.

- **SC:**(Subscriber Connector), also known as the square connector was also created by the Japanese company – Nippon Telegraph and Telephone. SC is a push-pull coupling type of connector and has a 2.5mm diameter. Nowadays, it is used mostly in single mode fiber optic patch cords, analog, GBIC, and CATV. SC is one of the most popular options, as its simplicity in design comes along with great durability and affordable prices.

- **LC:** (Lucent Connector) is a small factor connector (uses only a 1.25mm ferrule diameter) that has a snap coupling mechanism. Because of its small dimensions, it is the perfect fit for high-density connections, XFP, SFP, and SFP+ transceivers.

- **FC :**(Ferrule Connector) is a screw type connector with a 2.5mm ferrule. FC is a round shaped threaded fiber optic connector,mostly used on Datacom, telecom, measurement equipment, single-mode laser.

- **ST:** (Straight Tip) was invented by AT&T and uses a bayonet mount along with a long spring-loaded ferrule to support the fiber.











- **USB:** Universal Serial Bus is a standard that was developed in the mid-1990s that defines cables, connectors and communication protocols. This technology is designed to allow a connection, communication and power supply for peripheral devices and computers.

- **USB 1.1:** Full-Bandwidth USB, specification was the first release to be widely adopted by the consumer market. This specification allowed for a maximum bandwidth of 12Mbps.

- **USB 2.0:**or Hi-Speed USB, specification made many improvements over USB 1.1. The main improvement was an increase in bandwidth to a maximum of 480Mbps.

- **USB 3.2:** Super Speed USB with 3 varieties of 3.2 Gen 1(original name USB 3.0), 3.2Gen 2(original name USB 3.1), 3.2 Gen 2x2 (original name USB 3.2) with speed up to 5Gbps,10Gbps,20Gbps respectively.

USB version and connectors figure:

	Type A	Type B	Mini A	Mini B	Micro-A	Micro-B	Type C
USB 2.0							
USB 3.0							
USB 3.1&3.2							

- **NTSC :** The colour video standard used in North America and some other parts of the world created by the National Television Standards Committee in the 1950s. NTSC utilizes an interlaced video signals.

- **PAL:** Phase Alternate Line. A television standard in which the phase of the colour carrier is alternated from line to line. It takes four full images (8 fields) for the colour-to-horizontal images (8 fields) for the colour-to-horizontal phase relationship to return to the reference point. This alternation helps cancel out phase errors. For this reason, the hue control is not needed on a PAL TV set. PAL, is widely used in needed on a PAL TV set. PAL, is widely used in Western Europe, Australia, Africa, the Middle East, and Micronesia. PAL uses 625-line, 50-field (25 fps) composite colour transmission system.

- **SMPTE:** Society of Motion image and Television Engineers. A global organization, based in the United States, that sets standards for baseband visual communications. This includes film as well as video and television standards.

- **VESA:** Video Electronics Standards Association. An organization facilitating computer graphics through standards.

- **HDCP:** High-bandwidth Digital Content Protection (HDCP) was developed by Intel Corporation and is in wide use for protection of video during transmission between devices.

- **HDBaseT:** A video standard for the transmission of uncompressed video (HDMI signals) and related features using Cat 5e/Cat6 cabling infrastructure.

- **ST2110:** A SMPTE developed standard, ST2110 describes how to send digital video over and IP networks. Video is transmitted uncompressed with audio and other data in a separate streams.

SMPTE2110 is intended principally for broadcast production and distribution facilities where quality and flexibility are more important.

- **SDVoE:** Software Defined Video over Ethernet (SDVoE) is a method for transmission, distribution and management AV signals using a TCP/IP Ethernet infrastructure for transport with low latency. SDVoE is commonly used in integration applications.

●**Dante AV:** The Dante protocol was developed for and widely adopted in audio systems for the transmission of uncompressed digital audio on IP based networks. The more recent Dante AV specification includes support for digital video.

●**NDI:** Network Device interface (NDI) is a software standard developed by NewTek to enable video-compatible products to communicate, deliver, and receive broadcast quality video in a high quality, low latency manner that is frame-accurate and suitable for switching in a live production environment over TCP (UDP) Ethernet based networks. NDI is commonly found in broadcast applications.

●**RTMP:** Real-Time Messaging Protocol (RTMP) was initially a proprietary protocol developed by Macromedia (now Adobe) for streaming audio, video and data over the Internet, between a Flash player and a server.

●**RTSP :** The Real Time Streaming Protocol (RTSP) is a network control protocol designed for use in entertainment and communications systems to control streaming media servers. The protocol is used for establishing and controlling media sessions between end points.

●**MPEG:** Moving Picture Experts Group is a working group formed from ISO and IEC developing standards that allow audio/video digital compression and Transmission.

●**H.264:** Also known as AVC (Advanced Video Coding) or MPEG-4i is a common video compression standard. H.264 was standardized by the ITU-T Video Coding Experts Group (VCEG) together with the ISO/IEC JTC1 Moving Picture Experts Group (MPEG).

●**H.265:** Also known as **HEVC** (High Efficiency Video Coding)H.265 is the successor to the widely used H.264/AVC digital video coding standard. Developed under the auspices of ITU, resolutions up to 8192x4320 may be compressed.

●**API:** An Application Programming Interface (API) provides a predefined function which allows access capabilities and features or routines via a software or hardware, without accessing source code or understanding the details of inner working mechanism. An API call may execute a function and/or provide data feedback/report.

●**DMX512:** The communication standard developed by USITT for entertainment and digital lighting systems. The wide adoption of the Digital Multiplex (DMX) protocol has seen the protocol used for a wide range of other devices including video controllers. DMX512 is delivered over cable of 2 twisted pairs with 5pin XLR cables for connection.

●**ArtNet:** An ethernet protocol based on TCP/IP protocol stack, mainly used in entertainment/events applications. Built on the DMX512 data format, ArtNet enables multiple “universes” of DMX512 to be transmitted using ethernet networks for transport.

●**MIDI:** MIDI is the abbreviation of Musical Instrument Digital Interface. As the name indicates the protocol

was developed for communication between electronic musical instruments and latterly computers. MIDI instructions are triggers or commands sent over twisted pair cables, typically using 5pin DIN connectors.

●**OSC:** The principle of Open Sound Control (OSC) protocol is for networking sound synthesizers, computers, and multimedia devices for musical performance or show control. As with XML and JSON, the OSC protocol allows sharing data. OSC is transported via UDP packets between devices connected on an Ethernet.

●**Brightness:** Usually refers to the amount or intensity of video light produced on a screen without regard to colour. Sometimes called black level.

●**Contrast Ratio:** The ratio of the high light output level divided by the low light output level. In theory, the contrast ratio of the television system should be at least 100:1, if not 300:1. In reality, there are several limitations. Well-controlled viewing conditions should yield a practical contrast ratio of 30:1 to 50:1.

●**Colour Temperature:** The colour quality, expressed in degrees Kelvin (K), of a light source. The higher the colour temperature, the bluer the light. The lower the temperature, the redder the light. Benchmark colour temperature for the A/V industry include 5000°K, 6500°K, and 9000°K.

●**Saturation:** Chroma, Chroma gain. The intensity of the colour, or the extent to which a given colour in any image is free from white. The less white in a colour, the truer the colour or the greater its saturation. Saturation is the amount of pigment in a colour, and not the intensity.

●**Gamma:** The light output of a CRT is not linear with respect to the voltage input. The difference between what you should have and what is actually output is known as gamma.

●**Frame:** In interlaced video, a frame is one complete image. A video frame is made up of two fields, or two sets of interlaced lines. In a film, a frame is one still image of a series that makes up a motion image.

●**Genlock:** Allows synchronisation of otherwise video devices. A signal generator provides a signal pulses which connected devices can reference. Also see Black Burst and Color Burst.

●**Blackburst:** The video waveform without the video elements. It includes the vertical sync, horizontal sync, and the Chroma burst information. Blackburst is used to synchronize video equipment to align the video output.

●**Colour Burst:** In colour TV systems, a burst of subcarrier frequency located on the back part of the composite video signal. This serves as a colour synchronizing signal to establish a frequency and phase reference for the Chroma signal. Colour burst is 3.58 MHz for NTSC and 4.43 MHz for PAL.

●**Colour Bars:** A standard test pattern of several basic colours (white, yellow, cyan, green, magenta, red, blue, and black) as a reference for system alignment and testing. In NTSC video, the most commonly used colour bars are the SMPTE standard colour bars. In PAL video, the most commonly used colour bars are eight full field bars. On computer monitors the most commonly used colour bars are two rows of reversed colour bars

●**Seamless Switching:** A feature found on many video switchers. This feature causes the switcher to wait until

the vertical interval to switch. This avoids a glitch (temporary scrambling) which often is seen when switching between sources.

●**Scaling:** A conversion of a video or computer graphic signal from a starting resolution to a new resolution. Scaling from one resolution to another is typically done to optimize the signal for input to an image processor, transmission path or to improve its quality when presented on a particular display.

●**PIP:** Picture-In-Picture. A small image within a larger image created by scaling down one of image to make it smaller. Other forms of PIP displays include Picture-By-Picture (PBP) and Picture- With-Picture (PWP), which are commonly used with 16:9 aspect display devices. PBP and PWP image formats require a separate scaler for each video window .

●**HDR:** is a high dynamic range (HDR) technique used in imaging and photography to reproduce a greater dynamic range of luminosity than what is possible with standard digital imaging or photographic techniques. The aim is to present a similar range of luminance to that experienced through the human visual system.

●**UHD:** Standing for Ultra High Definition and comprising 4K and 8K television standards with a 16:9 ratio, UHD follows the 2K HDTV standard. A UHD 4K display has a physical resolution of 3840x2160 which is four times the area and twice both the width and height of a HDTV/FullHD (1920x1080) video signal.

●**EDID:** Extended Display Identification Data. EDID is a data structure used to communicate video display information, including native resolution and vertical interval refresh rate requirements, to a source device. The source device will then output the provided EDID data, ensuring proper video image quality.

6.3 Revision History

The table below lists the changes to the Video Processor User Manual.

Version	Date	ECO#	Description	Editor
V1.0	2022-12-16	0000#	Release	Aster

All information herein is Xiamen RGBlink Science & Technology Co Ltd. excepting noted.

RGBlink® is a registered trademark of Xiamen RGBlink Science & Technology Co Ltd.

While all efforts are made for accuracy at time of printing, we reserve the right to alter otherwise make change without notice.