


High protection

Die-cast aluminum material, anti-corrosion, moisture-proof, waterproof; at the same time, strong structure, strong wind resistance. The protection level reaches IP65, and suitable for various indoor and outdoor scenarios.

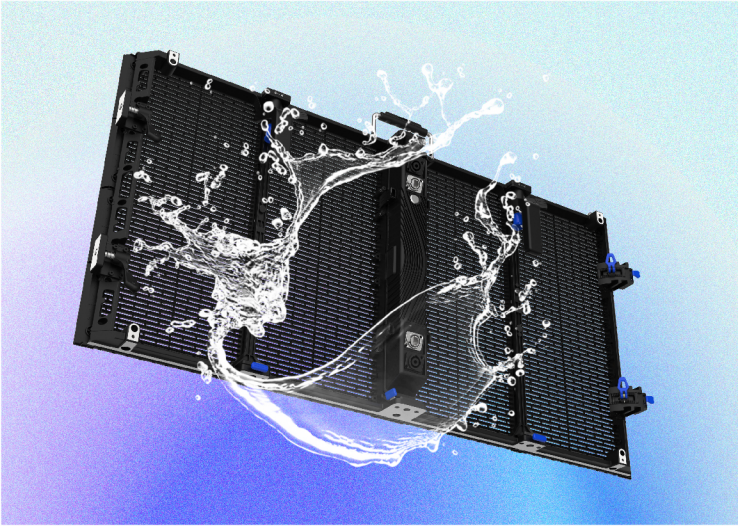

Product Parameter

Items		YMT-P03J-07IUFQ08-01
Module	LED Encapsulation	1515/1820/1820
	Pixel Pitch (mm)	3.9-7.8
	Module Resolution (W×H)	128*16
	Module Size (mm)	500*125
Cabinet	Module Quantity per Cabinet (W×H)	2*4
	Resolution (W×H)	256*64
	Size (mm)	1000*500*83
	Area (m ²)	0.5
	Weight (kg/Cabinet)	7.5
	Pixel Density (dot/m ²)	32768
	IP Grade	IP65
Optical Parameters	White Balance Brightness (nit)	3500~4000/4500~5000
	Horizontal/Vertical Viewing Angle (°)	160/140
Electrical Parameters	Power Consumption (W/m ²)	500±15%/ 200±15%
	Working Voltage	AC100~240V(50/60Hz)
Processing Performance	Driving Method	Constant Drive
	Frame Frequency (Hz)	50/60
	Refresh Rate (Hz)	≥1920(1920,2880,3840...)
	Control System	Nova
Usage parameters	Communication Mode	CAT 5
Certificate	Product Certification	CE,FCC,ETL

Hunan Yestech Optoelectronic Co., LTD.

HQ address: YES TECH Optoelectric Industrial Park, No.108 Qingzuhu Road,
Kaifu District, Changsha City, Hunan Province, China
Tel: +86-731-84539619
E-mail: yestech@yes-led.com

2024.01



www.yes-led.com



Facebook




MT Series

Universal rental transparent screen
Screen can be "invisible"

High Transparency for Indoor & Outdoor Use

One click changes to transparent or non-transparent one (optional).
Supports indoor and outdoor use and can be used as main screen, sky curtain, etc.

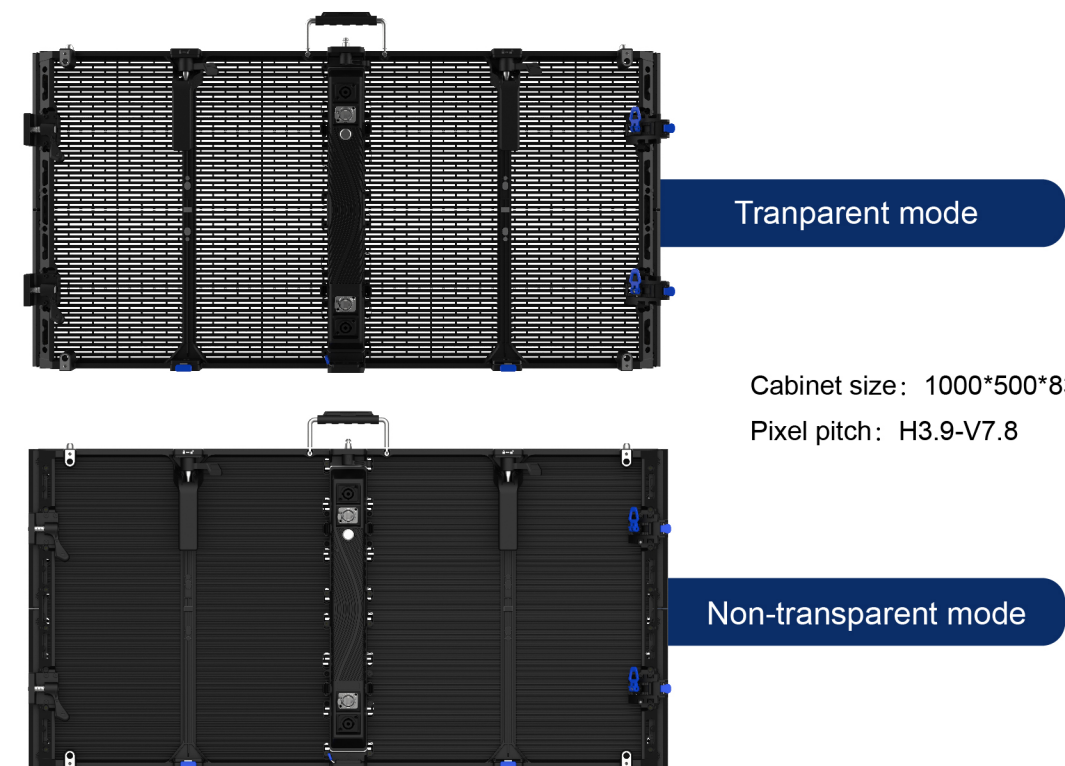

High transparency makes the image more three-dimensional




Ultra-thin make it more convenient for hanging

Adopting die-cast aluminum frame, the cabinet is light and thin, make it more convenient for hanging, Safety hanging height is 10m.




Easy Maintenance with integrated design

Support front and rear maintenance and adopt magnetic/screw to fix which makes the front maintenance more convenient. The integrated design of control box greatly improves the efficiency of installation and maintenance.

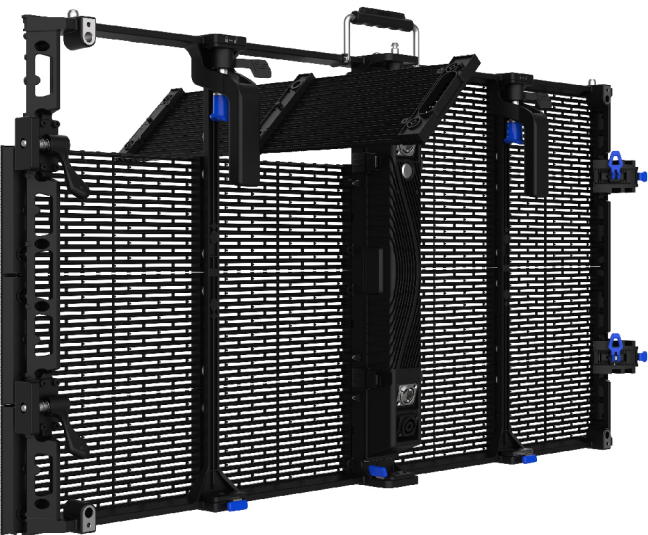

One-person installation, hands-free

Quick lock with large handle make it more comfortable for installation and easy disassembly by one person.

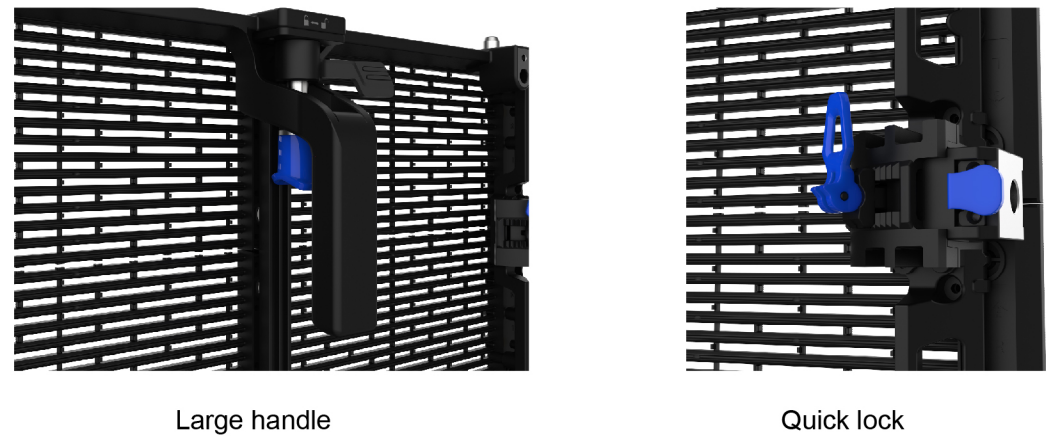

Support right angle and arc splicing

The cabinet supports 90° right-angle splicing of inner and outer arcs, which can realize square column design; Equipped with a high-precision arc lock, easily realize with $\pm 10^\circ$ inner and outer arcs, with more shapes and wider applications. (Here are the splicing diagrams.)

