



DMF-iAMP2300 WiFi

Digital Multi Function Integrated Matrix Amplifier

ITA

Specifiche tecniche

2 Channels class-D Matrix Amplifier Technology with Network Multimedia Player

Power @ 4Ω / 8Ω / 70 V / 100 V	2x 300 Wrms / output
Output	2x independent mono zone output or 1x stereo output
THD+N	< 0.5% @ 4Ω/8Ω
Load Impedance	min. 4Ω per channel
Input	2x line stereo, 1x USB, 1x BT, 1x Network player
Input Mic	2x mic + 3 band EQ + Talkover + 48 V on Mic2
S/N Ratio	95dB
EQ of Master Output	Treble: +/-15dB @ 5KHz-20KHz Bass: +/-15dB @ 20Hz-500Hz
Control Input/Output	One dry contact trigger input, one 24VDC/2A controlled output
Power Supply	AC 100-240 V, 50/60 Hz
Protection Circuits	AC fuse and overheat, overvoltage, overcurrent, short circuit, DC protection
Dimensions (WxDxH) / Weight	482x254x50mm (1U rack) / 3.83kg

Avvertenze di sicurezza

ATTENZIONE: Per ridurre il rischio di scosse elettriche, non rimuovere il coperchio dell'apparecchiatura.

All'interno non sono presenti parti riparabili dall'utente. Per qualsiasi intervento di assistenza o manutenzione, rivolgersi esclusivamente a personale tecnico qualificato. Pericolo di scossa elettrica.

All'interno dell'apparecchiatura possono essere presenti tensioni pericolose non isolate.

Non aprire il prodotto e non intervenire sui componenti interni.


Leggere attentamente tutte le istruzioni operative e di manutenzione prima di installare, utilizzare o sottoporre l'apparecchiatura a interventi di assistenza. Utilizzare esclusivamente in ambienti interni.

Non esporre il prodotto a pioggia, umidità o altri agenti atmosferici.

Prima dell'utilizzo, leggere integralmente il manuale di istruzioni e attenersi a tutte le indicazioni di sicurezza riportate nella documentazione fornita con il prodotto.



Vista frontale e posteriore

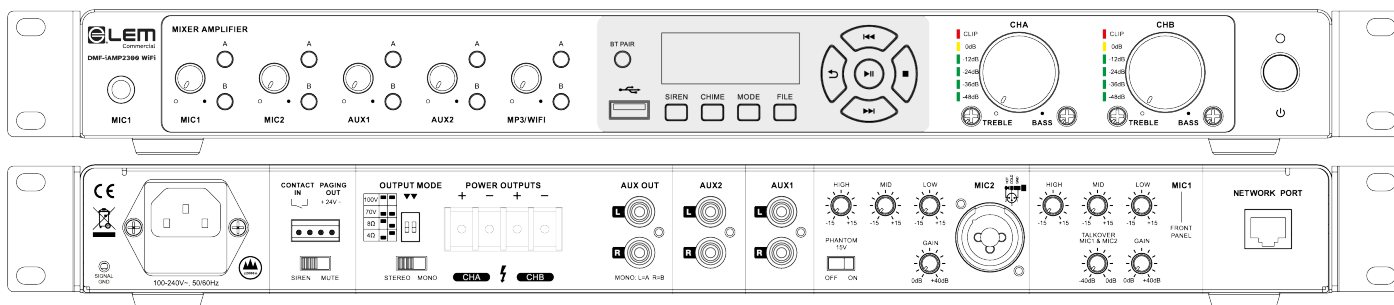



DMF-iAMP2300 WiFi

Digital Multi Function Integrated Matrix Amplifier

ENG

Technical specifications

2 Channels class-D Matrix Amplifier Technology with Network Multimedia Player

Power @ 4Ω / 8Ω / 70 V / 100 V	2x 300 Wrms / output
Output	2x independent mono zone output or 1x stereo output
THD+N	< 0.5% @ 4Ω/8Ω
Load Impedance	min. 4Ω per channel
Input	2x line stereo, 1x USB, 1x BT, 1x Network player
Input Mic	2x mic + 3 band EQ + Talkover + 48 V on Mic2
S/N Ratio	95dB
EQ of Master Output	Treble: +/-15dB @ 5KHz-20KHz Bass: +/-15dB @ 20Hz-500Hz
Control Input/Output	One dry contact trigger input, one 24VDC/2A controlled output
Power Supply	AC 100-240 V, 50/60 Hz
Protection Circuits	AC fuse and overheat, overvoltage, overcurrent, short circuit, DC protection
Dimensions (WxDxH) / Weight	482x254x50mm (1U rack) / 3.83kg

Safety warnings

CAUTION: To reduce the risk of electric shock, do not remove the equipment cover.

There are no user-serviceable parts inside. All servicing and maintenance operations must be carried out by qualified service personnel only.

Risk of electric shock. Hazardous uninsulated voltages may be present inside the equipment.

Do not open the product or attempt to service any internal components.

Important. Read all operating and maintenance instructions carefully before installing, operating, or servicing the equipment.

For indoor use only. Do not expose the product to rain, moisture, or other weather conditions.

Read the instruction manual in its entirety before use and follow all safety precautions and operating instructions provided with the product.



Front and rear views

