



EasyPro Series

For Main Application Scenarios of Commercial and Retail Display

- Thin, light weight design at 320*480*55mm at 2.3kg.
- Magnetic panels and modules for quick installation and assembly cut set up time and labor costs by 30%.
- Full front maintenance, easily remove panels and modules with our vacuum tool.
- Refresh rate of 3840 with no scan lines, perfect for taking pictures with a vivid and stable display.

EasyPro Series modular indoor LED made by

ego[®]
DISPLAY

EGO Display EasyPro Series is designed for indoor retail and commercial solutions.

EasyPro-P1.8/P2/P2.5



Markets: Entertainment/Boardroom/
Corporate/Retail
Pixel Pitch: 1.86/2/2.5mm
Panel Size: 320*480*55mm
Module Size: 320*160mm



480mm



320mm




55mm




Advanced Features EasyPro-P1.8/P2/P2.5

Panel Composition

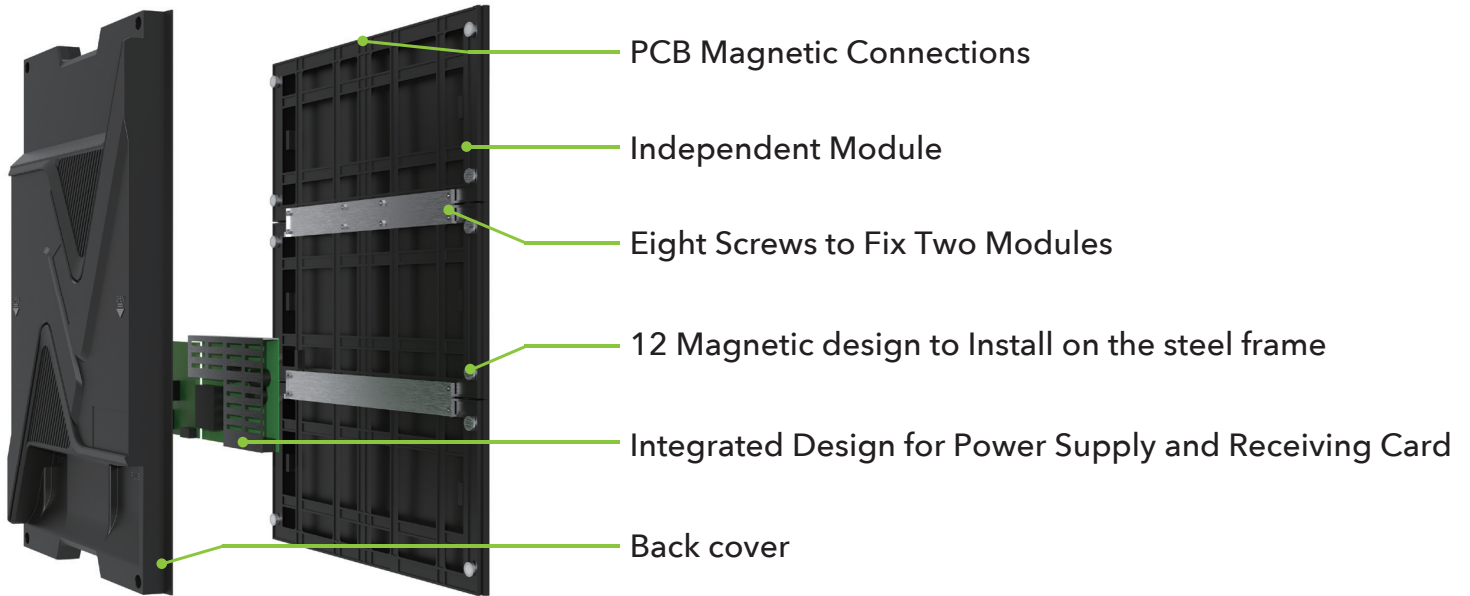

Direct to Frame Installation

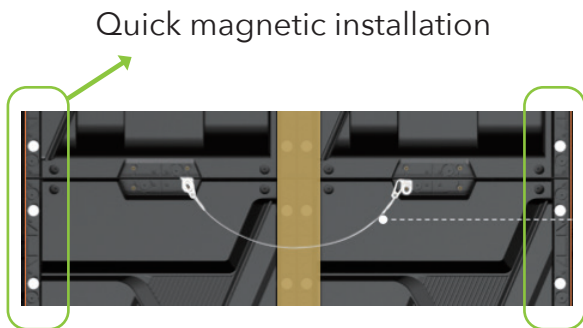


EasyPro Series modular indoor LED made by



Advanced Features

Application scenarios


For Main Application Scenarios of Commercial Display

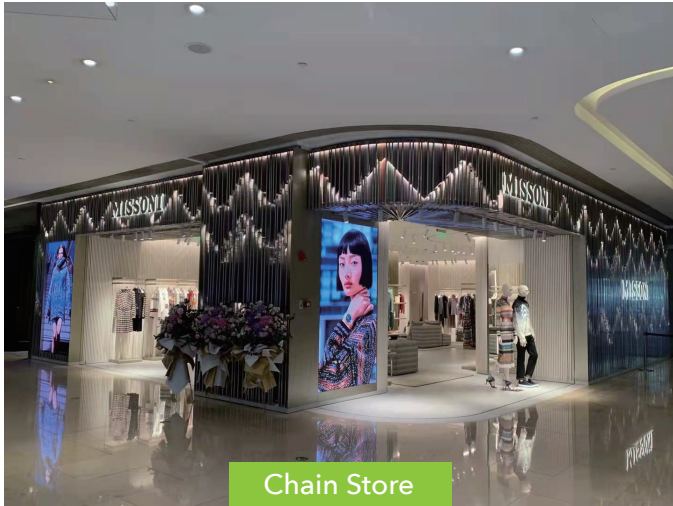


Chain Store



Retail & Mall

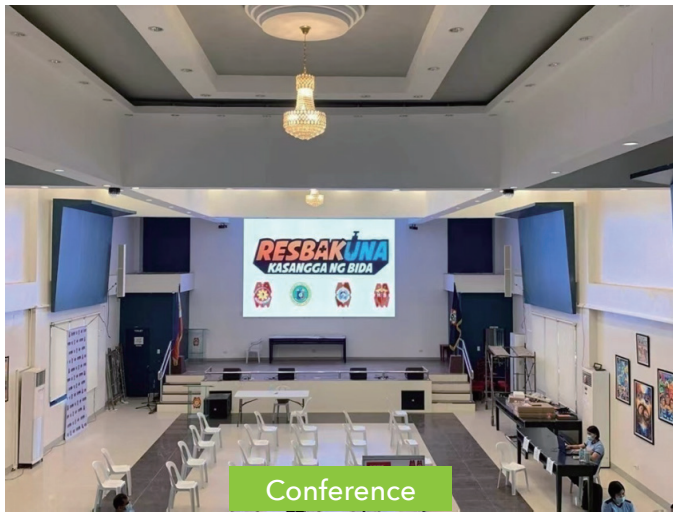

Conference

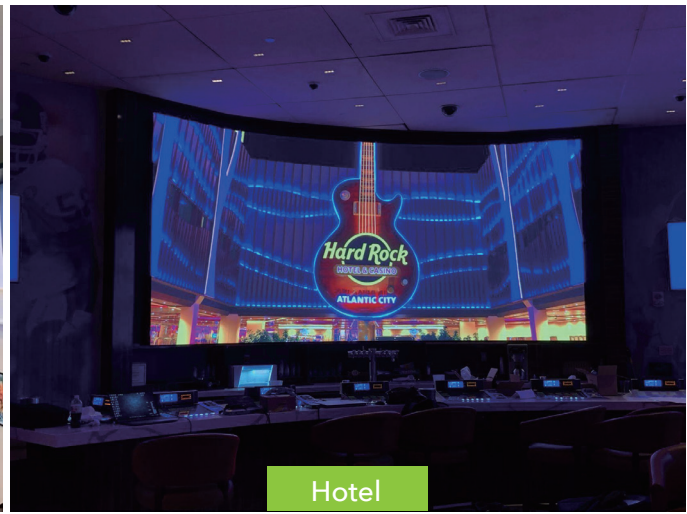

Hotel

And More Application Scenarios...

EasyPro Series modular indoor LED made by

ego[®]
DISPLAY

Specifications

Parameters	EasyPro-P1.8	EasyPro-P2	EasyPro-P2.5
LED Type	Black SMD 1515	Black SMD 1515	Black SMD 1515
Pixel Pitch (mm)	1.86	2	2.5
Panel Dimensions (W*H*D)(mm)	320×480×55	320×480×55	320×480×55
Pixel Per Panel	172x258	160×240	128x192
Panel Weight (kg)	2.3	2.4	2.1
Panel Material	Plastic	Plastic	Plastic
Module Dimensions (WxH)/(mm)	320×160	320×160	320×160
Brightness (nit)	500	500	500
Refresh Rate (Hz)	3840	3840	3840
Gray scale (bit)	14	14	14
Contrast Ratio	3000:1	3000:1	3000:1
Color Temperature (K)	8300	8300	8300
Viewing Angle (H/V) (°)	160/140	160/140	160/140
AC Operating Voltage (V)	100~240	100~240	100~240
Power Consumption (Max./Avg.)(W/m ²)	320/107	325/108	330/110
Storage Temperature (°C)	- 40~+60	- 40~+60	- 40~+60
Operating Temperature (°C)	- 10~+40	- 10~+40	- 10~+40
IP Rating (Front/Rear)	IP40/IP21	IP40/IP21	IP40/IP21
Module Maintenance	Front	Front	Front
PSU & Others Maintenance	Front	Front	Front
Panel Installation Type	Front	Front	Front
Max Rigging QTY.	/	/	/
Certificate		CCC/ CE	

EasyPro Series modular indoor LED made by

