



Accsoon SeeMo Pro

User Manual

使用说明书

V1.0



Accsoon SeeMo Pro	x 1
USB-C to Lightning Cable*	x 1
USB-C to USB-C Cable*	x 1
SeeMo Mount Bracket	x 1
M2.5*8 Screw	x 5
L Shape Wrench	x 1
User Manual	x 1

*Note:


1. Use only the included USB-C to Lightning cable to connect the Accsoon SeeMo product lines with your iPhone/iPad. Accsoon SeeMo product lines cannot be used with other brands' USB-C to Lightning cables.
2. The included cables are custom cables only for use with Accsoon SeeMo product lines. Please do not use the cable with products other than Accsoon SeeMo product lines otherwise Accsoon makes no commitment to the performance of the cable, and the user is responsible for the consequences.

SeeMo Pro


Contents

Accsoon SeeMo Pro	04
Introduction	06
Instruction	07
Specification	11
Warranty	12
Contact Us	13

SeeMo Pro

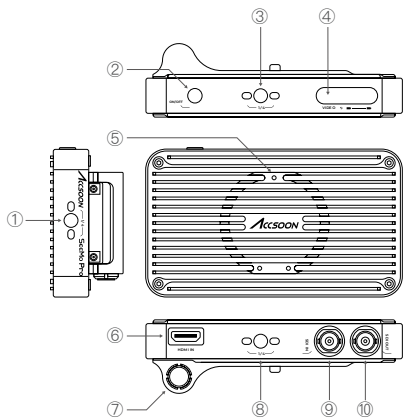

- ① 1/4"-20 Mounting Point
- ② Power Button
- ③ 1/4"-20 Mounting Point
- ④ Video Source and Power Level Indicator Light
- ⑤ Mounting Points for SeeMo Bracket
- ⑥ HDMI Input Port
- ⑦ 2 Pin DC Power Input

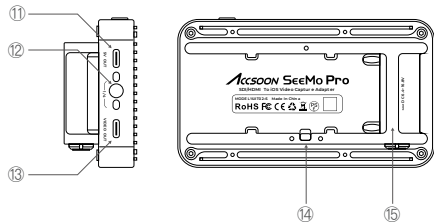

- ⑧ 1/4"-20 Mounting Point
- ⑨ SDI Input Port
- ⑩ SDI Loop Out Port
- ⑪ USB-C Power Output Port (5V Out)
- ⑫ 1/4"-20 Mounting Point
- ⑬ Video Output Port
- ⑭ Safety Lock
- ⑮ NP-F Battery Holder

Introduction

Built on the technology of the original SeeMo HDMI model, the SeeMo Pro SDI is a small box that goes in-between your camera or other SDI/HDMI source and your iOS device via Lightning or USB-C cable.

The SeeMo Pro SDI can accept HD signals up to 1080p 60fps over either HD SDI or HDMI from cameras, mixers, game consoles and wireless receivers.

SeeMo Pro connects your SDI or HDMI camera to the vast world of iOS connectivity and apps. You can now record, edit, stream and share video from your SDI camera as simply as if it were shot on your iPhone to start with. It opens up new ways of working, all with the simplicity and elegance of iOS apps and hardware.

Product Features

Turn your iPhone/iPad into a professional monitor
SDI in & loop out

HDMI in

Video input and output support up to 1080p 60fps

Powered by 2 pin DC or NP-F battery

iPhone and iPad charging

USB-C charging for other devices

H.264 video compression

Variable Bitrate

Visually lossless image quality

Rich monitoring features

Video and audio recording

RTMP live streaming

Flexible and versatile


Standard 1/4"-20 mounting points

Instruction

01 Download and install the Accsoon SEE App on your iPhone or iPad from Apple App Store.




02 Mount the Accsoon SeeMo Pro via a 1/4"-20 mounting point. To use with iPads, you can use with an Accsoon iPad PowerCage (optional product).

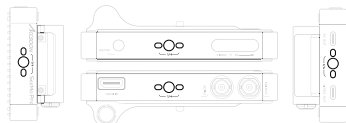


1/4"-20 mounting point × 4


03 Attach an NP-F series battery or connect to a DC power (6.4-16.8V).

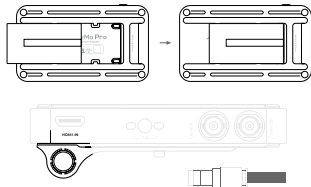


- 04** Connect the Accsoon SeeMo Pro to the camera using a SDI or HDMI cable (not included).

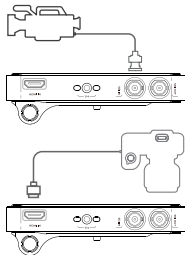

- 05** If there is a need to power other devices (e.g. Accsoon CineView series), connect the cable to the USB-C power output port.

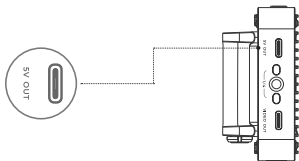

- 06** Connect your iPhone/iPad to the Accsoon SeeMo Pro's USB-C video output port using the corresponding USB-C cable.

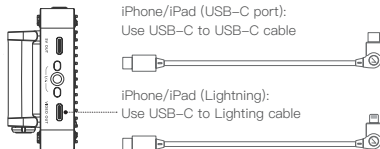


- 07** Power On | Power Off




Power On:
Press the power button and the power indicator light will turn on

Power Off:
Hold the power button for 2 seconds

- 08** Open the Accsoon SEE App, tap "Monitor" to start monitoring.



Attach the Accsoon SeeMo Pro to the Accsoon iPad PowerCage Gen 2 (optional product)

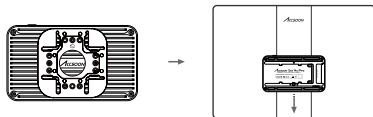


Screw the SeeMo bracket to the front of the Accsoon SeeMo Pro. Slide and lock down the Accsoon SeeMo Pro to the back of the iPad PowerCage Gen 2.

09 Status Indicator

Power level indicator



Video source indicator
 On – Valid video input detected
 Off – No valid video input




10 Live Streaming

Please make sure the iPhone/iPad can access the network via "WiFi" or "4G/5G" network.



Tap the "Live" button on the App, enter the RTMP live address and code then tap "OK" to start live streaming.

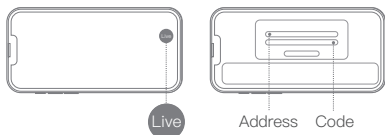

Note: The fluency of the live streaming depends on the stability of the internet connection. When the video is buffering, please check whether your internet connection is heavily loaded or your mobile network has poor reception quality.

Specification

Video Input Port	SDI in, HDMI in
SDI Video Input Format	1080p 23.98/24/25/29.97/30/50/59.94/60fps Level A/B 720p 50/59.94/60fps
SDI Loop Out Format	1080p 23.98/24/25/29.97/30/50/59.94/60fps Level A/B 720p 50/59.94/60fps
Video Output Port	SDI loop out, USB out
Video Output Format	1080p 24/25/30/50/60fps 720p 50/60fps
Battery Compatibility	NP-F550/F750/F970
Power Output Port	USB-C Output 5V/3A
Power Input Port	2 PIN DC Input 6.4~16.8V
iOS Version	iOS 12.0 or later
Power Consumption	3.5Watt (without charging other devices)
Operating Environment Temperature	-10°C ~40°C
Dimensions	125mm×72mm×35.5mm
Weight	224g

Warranty

01 Warranty Period

1. If there is a quality problem that occurs within 15 days after receiving the product, Accsoon will be providing complimentary maintenance or replacement.
2. Under proper use and maintenance, from the date of receipt, Accsoon will provide a one-year warranty on the product and a three-month warranty on the accessories and cables. Free maintenance service is available during the warranty period.
3. Please keep the proof of purchase and the user manual in a safe place.

02 Warranty Exclusions

1. Out of warranty (If the proof of purchase is not available, the warranty will be calculated from the date the product is delivered from the factory).
2. Damage caused by use or maintenance is not following the requirements of the product manual.
3. Unauthorized repair, modification or disassembly.
4. Damage caused by force majeure such as fire, flood, lightning strike, etc.






03 Warranty Process


1. Contact your local Accsoon authorized dealers for after-sales service. If there is no local authorized dealers, you can contact our customer service via our email (support@accsoon.com) or website (www.accsoon.com) and get appropriate support.
2. You will get detailed solutions from the authorized dealers or Accsoon.
3. Accsoon reserves the right to review the damaged product.

Safety Information

- When operating this equipment, read and follow all the instructions in this manual.
- Use only accessories/batteries/chargers specified or recommended by Accsoon.
- Do not expose to moisture, excessive heat or fire.
- Keep away from water and other liquids.
- Keep the equipment properly during lightning storms or when unused for long periods of time.
- Please do not use the product in a place overheating, under cooling or with lots of moisture, or nearby strong magnetic devices.
- To reduce the risk of fire or electric shock, refer servicing to qualified service personnel.

Contact Us

-  Facebook: Accsoon
-  Facebook Group: Accsoon Official User Group
-  Instagram: accsoontech
-  YouTube: ACCSOON
-  Email: Support@accsoon.com

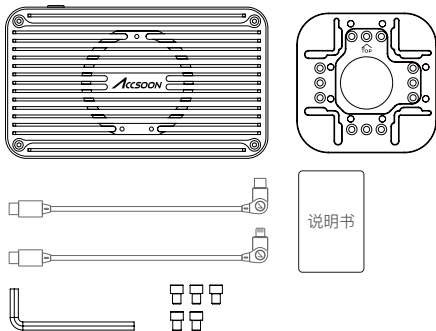

致迅 SeeMo Pro	× 1
USB-C 转 Lightning 数据线	× 1
USB-C 转 USB-C 数据线	× 1
致迅 SeeMo 转接件	× 1
M2.5*8 螺钉	× 5
内六角扳手	× 1
说明书	× 1

注：

1：仅设备随附的 USB-C 转 Lightning 线可以搭配致迅 SeeMo 系列产品使用；致迅 SeeMo 系列产品无法与其他品牌的 USB-C 转 Lightning 线搭配使用。


2：设备随附的线材为定制线材，仅限于搭配致迅 SeeMo 系列产品使用。如搭配其他设备使用，致迅不对线材功能性能做任何承诺，由此造成的后果由用户自行承担。

SeeMo Pro


目录

认识 SeeMo Pro	16
产品介绍	18
使用说明	19
产品规格	23
保修说明	24
联络我们	25

认识 SeeMo Pro

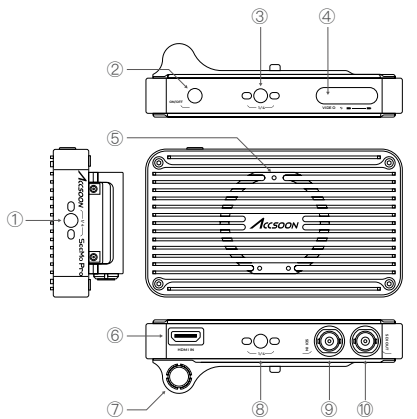

- ① 1/4 螺纹孔
- ② 电源开关键
- ③ 1/4 螺纹孔
- ④ 视频源及电源指示灯
- ⑤ 致迅 SeeMo 转接件安装孔
- ⑥ HDMI 输入接口
- ⑦ 双针 DC 电源输入接口
- ⑧ 1/4 螺纹孔
- ⑨ SDI 输入接口
- ⑩ SDI 环出接口

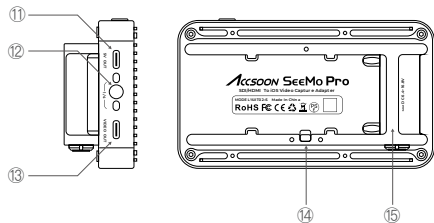

- ⑪ USB-C 对外供电接口 (5V 输出)
- ⑫ 1/4 螺纹孔
- ⑬ 视频输出接口
- ⑭ 电池安全锁扣
- ⑮ 电池座

产品介绍

简介

Accsoon SeeMo Pro 是一款 SDI&HDMI-USB 专业智能监看设备，成功实现了苹果 iPhone 和 iPad 设备的专业监看。在传输视频的同时，还能够为 iPhone 和 iPad 供电，保证拍摄续航，利好影视拍摄、新闻播报、体育转播等专业应用场景。

视频采用 H.264 压缩，码流可调整，最高码流可达到视觉无损画质，搭配致迅的 Accsoon SEE App，录制、剪辑、直播、分享，皆可以在苹果手机或平板上完成，简洁、优雅，并将不断集成更多第三方功能。

产品特点

将 iPhone/iPad 变为专业监视器

SDI 视频输入及环出

HDMI 视频输入

视频输入输出最高支持 1080p60fps

支持双针 DC 电源输入及 NP-F 系列电池供电

支持为 iPhone 及 iPad 充电

支持 USB-C 对外供电

H.264 视频压缩

可调整码流

视觉无损画质

丰富的监看功能

支持音视频录制

App 支持 RTMP 直播

拓展丰富，灵活多用

标准 1/4 英寸螺纹安装孔，实用性强

使用说明


- 01 通过苹果应用商城下载安装 Accsoon SEE App 至苹果设备。




- 02 通过 1/4 螺纹孔安装 Accsoon SeeMo Pro。如需搭配 iPad 设备使用，可另购致迅 iPad 免笼。




- 03 安装 NP-F 系列电池或连接至 DC 电源 (6.4-16.8V)。

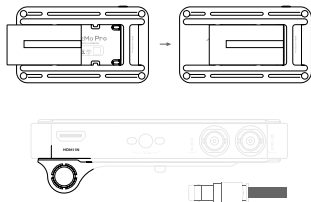

04 使用 SDI 或 HDMI 线 (需另购) 连接致讯 SeeMo Pro 和相机。

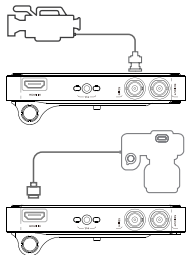


05 如需给其他设备 (如致讯影眸图传) 供电, 请使用相应的线材连接到 USB-C 供电口。

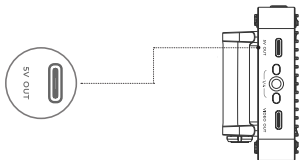

06 根据使用的苹果设备选择相应的线材连接至致讯 SeeMo Pro 的 USB-C 视频接口。




07 开机 | 关机




开机: 单击电源键; 开机后电源指示灯常亮
关机: 长按电源键 2 秒

08 打开 Accsoon SEE App, 点击“Monitor”即可进入监视界面。




将致讯 SeeMo Pro 安装到二代致讯 iPad 套件 (需另购)

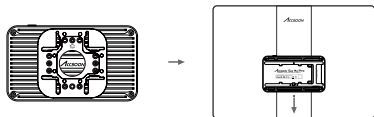

将 SeeMo 转接件安装到致讯 SeeMo Pro 正面。
通过转接件将致讯 SeeMo Pro 安装到二代致讯 iPad 套件的支架上。

09 状态指示

电量指示



视频源状态指示

当检测到有效的视频输入后，视频源状态指示灯常亮。


- ● ● ● >75%
- ● ● ○ 50%~75%
- ● ● ○ 25%~50%
- ● ● ○ 0%~25%
- ✱ ○ ○ ○ 闪烁 电量不足

11 直播功能

① 请确保苹果设备可以通过“WiFi”或者“4G/5G”访问网络。



② 监看的同时，点击 App 上的“Live”按钮，按照提示输入直播地址和直播码后点击“确定”即可进行直播。

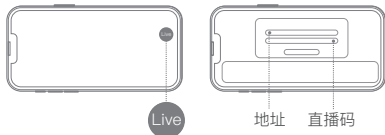

注意：直播的流畅程度取决于网络连接的稳定性，与致讯 SeeMo Pro 无关。如有卡顿请检查所使用的网络。

产品规格

视频输入接口	SDI 输入， HDMI 输入
SDI 视频输入格式	1080p 23.98/24/25/29.97/30/50/ 59.94/60fps Level A/B 720p 50/59.94/60fps
SDI 环出格式	1080p 23.98/24/25/29.97/30/50/ 59.94/60fps Level A/B 720p 50/59.94/60fps
视频输出接口	SDI 环出， USB-C 输出
视频输出格式	1080p 24/25/30/50/60fps 720p 50/60fps
适配电池	NP-F550/F750/F970
对外供电接口	USB-C 输出 5V/3A
供电接口	双针 DC 输入 6.4~16.8V
iOS 版本	iOS 12.0 及以上
功耗	3.5 瓦（未给其他设备供电情况下）
工作环境温度	-10℃ ~40℃
尺寸	125mm×72mm×35.5mm
重量	224g

保修说明

01 质保期限

1. 自签收之日起 15 日内，出现质量问题，可享受换货或者免费维修服务。
2. 产品在正确使用及保养下，保修期为自签收之日起一年（附件和线材保修期为 3 个月），在保修期内可享受免费维修服务。
3. 请妥善保管好购买凭证、说明书。

02 质保不包括

1. 超过三包有效期的（无法提供购买凭证的从产品出厂日期开始计算）。
2. 未按产品使用说明书要求使用、维护、保养造成损坏的。
3. 未经授权的维修、拆解。
4. 因火灾、水灾、雷击等不可抗力造成的损坏。

03 售后支持

1. 如产品需要售后，可联系当地致迅授权经销商，如无当地授权经销商可以通过致迅公司邮箱（support@accsoon.com）或网站（www.accsoon.com）与客服取得联系并获得相应支持。
2. 致迅经销商或致迅客服会告知您如何运送相关产品及如何处理您的保修问题，致迅公司保留复查损坏产品的权利

安全信息

- 操作本设备时，请阅读并遵循本手册中的所有说明。
- 只能使用 Accsoon 指定或推荐的附件 / 电池 / 充电器。
- 不要暴露在潮湿、过热或火灾中。
- 远离水和其他液体。
- 在暴雨期间或长时间不使用时，应妥善保管设备。
- 请勿在过热、冷却不足或水分过多的地方，或在强磁性设备附近使用本产品。
- 为降低火灾或触电风险，请向合格的维修人员咨询维修。

联系我们



官方网站



微信号



微信公众号



Bilibili

Certificate of Quality

This product is confirmed to meet quality standards and permitted for sale after strict inspection.

QC Inspector: _____



合格证

本产品经严格检验符合标准，
准予销售

检验员: _____



Accsoon SeeMo Pro

Accsoon® is a trademark of Accsoon Technology Co.,Ltd.

Copyright© 2023 Accsoon C All rights reserved

Accsoon® 是致讯科技的商标 Copyright© 2023 致讯科技版权所有