



# IP-9000TX

1G 4K60 AV over IP Transmitter with USB & PoE

**OPERATION MANUAL**

 Dante®

 Audinate®

Dante Ready™

**HDMI**®  
HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

## **DISCLAIMERS**

The information in this manual has been carefully checked and is believed to be accurate. CYP (UK) Ltd assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

CYP (UK) Ltd assumes no responsibility for any inaccuracies that may be contained in this document. CYP (UK) Ltd also makes no commitment to update or to keep current the information contained in this document.

CYP (UK) Ltd reserves the right to make improvements to this document and/or product at any time and without notice.

## **COPYRIGHT NOTICE**

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from CYP (UK) Ltd.

© Copyright 2024 by CYP (UK) Ltd.

All Rights Reserved.

Version 1.1

## **TRADEMARK ACKNOWLEDGMENTS**

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

---



## SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply. Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.
- Please completely disconnect the power when the unit is not in use to avoid wasting electricity.

## VERSION HISTORY

REV.	DATE	SUMMARY OF CHANGE
<b>v1.00</b>	16/09/2024	Initial Release
<b>v1.01</b>	12/11/2024	Added note about PSU
<b>v1.02</b>	25/11/2024	Updated some descriptions
<b>v1.03</b>	14/04/2025	Updated Features (Latency)

# CONTENTS

<b>1. Introduction</b> .....	<b>1</b>
<b>2. Applications</b> .....	<b>2</b>
<b>3. Package Contents</b> .....	<b>2</b>
<b>4. System Requirements</b> .....	<b>3</b>
<b>5. Features</b> .....	<b>3</b>
<b>6. Operation Controls and Functions</b> .....	<b>5</b>
6.1 Front Panel .....	5
6.2 Rear Panel .....	6
6.3 IR Cable Pinouts .....	7
6.4 Serial Defaults .....	7
6.5 WebGUI Control .....	8
6.5.1 System Tab .....	10
6.5.2 Network Tab .....	13
6.5.3 Functions Tab .....	15
6.6 Telnet Control .....	17
6.7 Telnet Commands .....	17
<b>7. Dante Ready</b> .....	<b>28</b>
7.1 Dante Ready Compatibility .....	28
7.1.1 Quick Walkthrough .....	28
7.1.2 Online Activation .....	29
<b>8. Connection Diagram</b> .....	<b>33</b>
<b>9. Specifications</b> .....	<b>34</b>
9.1 Technical Specifications .....	34
9.2 Video Specifications .....	35
9.3 Audio Specifications .....	37
9.3.1 Digital Audio .....	37
9.3.2 Analogue Audio .....	37
9.3.3 AVoIP Audio Availability .....	38
9.4 Cable Specifications .....	39
<b>10. Acronyms</b> .....	<b>40</b>

---

## 1. INTRODUCTION

The IP-9000TX 1G AV over IP encoder with full 4K HDR and Dolby Vision support is the latest advancement in AV over IP technology. Supporting both Unicast and Multicast modes, enabling AV signals distribution with video wall modes and USB functionality in Multicast mode. It supports the transmission of Ultra High-Definition signals (up to 4K@60Hz 4:4:4 plus 4K HDR and Dolby Vision) with audio, IR, RS-232 and USB 2.0 up to 100m on a single cable. The USB connectivity allows for the connection of USB flash drives, webcams, keyboard, and mouse etc. The transmission distance can be further extended (up to 100m per segment) by using gigabit network switches, allowing the user to cascade the system without signal loss or introducing delay.

When the extension system's units are in multicast mode, a single transmitter's AV signal can be sent to a large number of receivers within the same local network without the additional receivers causing any bandwidth requirement increase. Additionally, that same multicast signal can be used to create large multi-display video walls with amazing simplicity. When combined with the optional IP Master Controller (IP-CS9000) the functionality of the system expands exponentially. Its centralised web-based interface greatly simplifies control and management of large, distributed video matrix or video wall systems adding to their flexibility in large residential or commercial installations.

This system also features bi-directional IR and RS-232 pass-through, analogue line level in/out, and a microphone input (on the receiver), providing the user with a variety of audio options. The USB functionality allows the system to act like a remote USB hub which, when combined with the HDMI input/output feature, provides a flexible remote platform for the seamless control of multiple PC systems. Configuration information is provided via On Screen Display (OSD) and the encoder own WebGUI plus using the IP-CS9000 IP Master Controller, and direct Telnet commands.

The IP-9000TX is Dante Ready which can transmit Dante data upon activation and is compatible with any standard Dante audio transmitters/receivers that the audio might be routed to. Dante Ready provides a flexible way to enable and expand the connectivity and interoperability of the world's de-facto AV-over-IP solution, even after the initial purchase. Upgrade your system with Dante and connect to over 4,000 products from 500 manufacturers. Dante Ready is built within the widely used Dante Controller application for Dante audio and video subscription

management. Transactions are simple and secure, and device upgrades are seamlessly actioned without the need to enter complex license keys of copy license files.

## 2. APPLICATIONS

- /// HDMI, USB, Audio, IR, and RS-232 extension
- /// Broadcasting a system over a single Cat.5e/6/7 cable
- /// Multimedia display on a large number of displays via multicast
- /// Hotel or convention center display multi-monitor broadcast
- /// Long distance data and video transmission via cascading
- /// Distributed video matrix system
- /// Distributed video wall system
- /// Seamless control of PC systems

## 3. PACKAGE CONTENTS

- /// 1× IP-9000TX AV over IP Transmitter
- /// 1× IR Blaster cable
- /// 1× Operation Manual
- /// 1× 3-way phoenix block

*Note: This device is generally PoE powered and as such its PSU, the PSU-12V1.25A-L is not supplied. Contact your CYP distributor to order the optional PSU*

## 4. SYSTEM REQUIREMENTS

- /// HDMI source equipment such as media players, video game consoles , PCs, or set-top boxes
- /// A Gigabit Ethernet network switch with jumbo frame support is required for multi-unit configurations. (8K jumbo frames are strongly recommended.)
- /// A Gigabit Ethernet switch with “IGMP snooping” enabled is required for multicast support.
- /// The use of Premium High Speed HDMI cables, and industry standard Cat.6, Cat.6A, or Cat.7 Ethernet cable is highly recommended.
- /// An active network connection from a switch or router that supports PoE (802.3af) for extension of Dante audio and to power the unit.
- /// 3rd party control software, such as Dante Controller from Audinate, is required to configure and manage audio routes between Dante endpoints.


## 5. FEATURES

- /// 4K@60 1Gbps AV over IP transmitter in Unicast or Multicast mode
- /// Full 4K60 4:4:4, HDR10, HDR10+, Dolby Vision & HLG compatible
- /// Less than one frame of latency at 4K 60Hz.
- /// IP interface: RJ45
- /// Supports USB over IP (flash drive, USB web cam (isochronous/Bulk), keyboard and mouse) and seamless control of multiple PC systems
- /// Supports PoE-PD (IEEE 802.3af)
- /// Bi-directional IR and RS-232 pass-through
- /// Controlled via WebGUI, IP Master Controller, and Telnet
- /// 1×HDMI input, 1×HDMI loopback output
- /// Supports the use of an external control system (IP Master Controller) to provide expanded functionality (Contact your authorised dealer for more information)
- /// Supports independent breakaway A/V and control matrix routing
- /// Supports extension of many audio formats including 8 channel LPCM and standard Bitstream

- /// The analogue Line In is automatically embedded in the streaming output and can be independently routed to any receiver
- /// Optional Dante Ready™ is compatible with existing Dante and AES67 audio networks
- /// Dante Ready brings Dante functionality to products already shipping and installed in sites.
- /// Channels and features can be added as an installation grows.

## 6. OPERATION CONTROLS AND FUNCTIONS

### 6.1 Front Panel

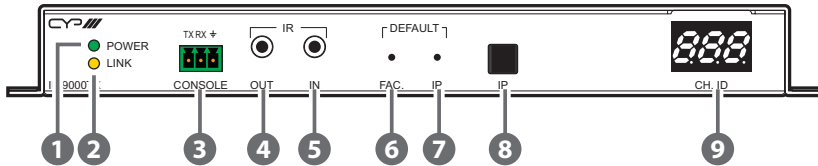


- 1 POWER LED:** This LED will flash while the unit is powering on and will illuminate solidly once it is ready to be used.
- 2 LINK LED:** If the transmitter has no network connection the LINK LED will not illuminate. While the transmitter is attempting to establish a connection with a receiver the LINK LED will flash. When the transmitter has established a stable connection with a receiver the LINK LED will illuminate solidly.
- 3 CONSOLE CTL 3-pin Terminal Block:** Connect to a PC, laptop, or serial controllable device with a 3-pin adapter cable for the extension of RS-232 signals to the currently routed receiver. The baud rate is configurable, but the default baud rate is 115200.

*Note: When the transmitter is in multicast mode every connected receiver unit can send RS-232 commands to the transmitter and commands sent from the transmitter side will be sent to all associated receivers.*
- 4 IR OUT Port:** Connect to the provided IR Blaster to transmit IR signals from the associated receiver to devices within direct line-of-sight of the IR Blaster.
- 5 IR IN Port:** Connect to the provided IR Extender to extend the IR control range of remotely located devices. Ensure that the remote being used is within direct line-of-sight of the IR Extender.
- 6 RESET FAC. Pinhole:** Press this recessed button to reboot the unit and all settings will be returned to the factory defaults (Including resetting the IP mode to auto, broadcast channel to 0, and the streaming mode to multicast). A new IP address will be assigned automatically within the 169.254.xxx.xxx address range.
- 7 RESET IP Pinhole:** Press this recessed button to reset the unit's IP settings and reboot the unit.
- 8 IP Button:** Press this button to sequentially display the current broadcast channel and IP address.

- 9 CH. ID Display:** Display information of current broadcast channel and IP address.


## 6.2 Rear Panel

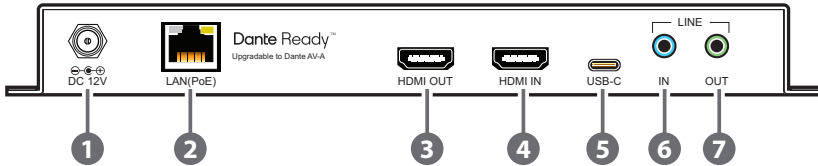


- 1 DC 12V Port:** Plug the 12V DC power adapter into the unit and connect it to an AC wall outlet for power.  
*Note: Optional, not needed if the unit is powered via PoE.*
- 2 LAN (PoE) Port:** Connect via a Gigabit Ethernet switch to compatible receiver to transmit data, and to a PC/laptop to control the unit via WebGUI.  
*Note: This unit can be powered directly by the connected Gigabit Ethernet switch if it provides PoE (802.3af).*
- 3 HDMI OUT Port:** Connect to a HDMI equipped TV/monitor to locally view the connected HDMI input source.
- 4 HDMI IN Port:** Connect to HDMI source equipment such as a media player, game console, or set-top box.
- 5 USB (Type-C) Port:** Connect directly to a PC or laptop to extend its USB functionality to the ports on the connected receiver.
- 6 LINE IN Port:** Connect to the analogue stereo output of a device such as a PC, laptop, or audio player.
- 7 LINE OUT Port:** Connect to powered speakers or an amplifier for mono analogue audio output. This will output the audio from the Mic In on the currently routed receiver.  
*Note: This function is only available in Unicast mode. The Mic In audio channel from the receiver is only active when an analogue source is also connected to the Line In port on the transmitter.*

### 6.3 IR Cable Pinouts

IR Blaster Cable



IR Extender Cable



### 6.4 Serial Defaults

Serial Port Default Settings	
<b>Baud Rate</b>	115200
<b>Data Bits</b>	8
<b>Parity Bits</b>	None
<b>Stop Bits</b>	1
<b>Flow Control</b>	None


## 6.5 WebGUI Control

### Device Discovery


Please obtain the “Device Discovery” software from your authorised dealer and save it in a directory where you can easily find it.

Connect the unit and your PC/Laptop to the same active network and execute the “Device Discovery” software. Click on “Find Devices on Internet” and a list of devices connected to the local network will show up indicating their current IP address.

*Note: This unit defaults to Auto IP mode. The current IP address can be verified via the receiver’s OSD or front panel if the Device Discovery software is not available.*

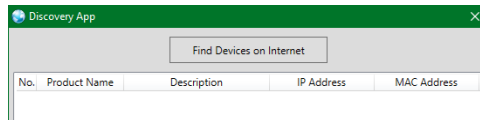

By clicking on one of the listed devices you will be presented with the network details of that particular device.

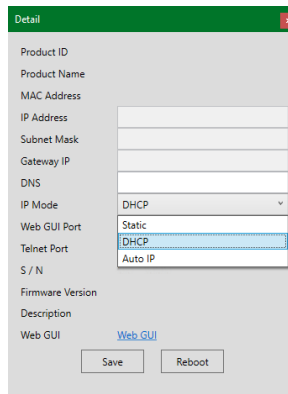

- 1) IP Mode:** If you choose, you can alter the static IP network settings for the device, or switch the unit into DHCP mode to automatically obtain proper network settings from a local DHCP server. To switch to DHCP mode, please select DHCP from the IP mode drop-down, then click “Save” followed by “Reboot”.


- 2) **WebGUI Hotkey:** Once you are satisfied with the network settings, you may use them to connect via Telnet or WebGUI. The network information window provides a convenient link to launch the WebGUI directly.

### WebGUI Overview

All major functions of the unit, including status, streaming method, streaming channel selection, output resolution, video wall configuration, EDID management, Ethernet settings, and reset/firmware functions are controllable via multiple tabs in the WebGUI interface allowing for reasonably intuitive operation.

Each transmitter, receiver, or transceiver is controlled by its own WebGUI interface which may be accessed by opening a standard web browser on a PC and typing in the IP address of the unit you wish to connect to.

On stand-alone transmitters/receivers you can discover the IP address by checking the status OSD that is displayed when there is no live video source or no live link, each connected receiver will output a 640×480 black screen with OSD text at the bottom identifying its own IP address (Local IP), as well as the IP address of the transmitter (Remote IP) that shares the same broadcasting channel with it (channel 0 by default).



```
FW: 15-Nov-10 4298
Local IP: 169.254.9.180
Remote IP: 169.254.11.173
ID: FFFFFFFF
```


After connecting to a unit's WebGUI, you will find a screen containing multiple tabs for each functionality area of the unit. The individual tabs and functions will be introduced in the following sections.

*Note: AVoIP streaming uses a large amount of bandwidth (especially at higher resolutions) and a Gigabit Ethernet network switch with jumbo frame support and IGMP snooping is required. A professional managed switch with VLAN support is strongly recommended. Please note that most consumer-grade routers are not able to handle the high traffic rates generated by multicast mode, so using a router directly as your network switch is discouraged. It is strongly suggested to avoid mixing your regular network traffic with AVoIP streaming traffic and the AVoIP traffic should exist within a separate subnet, at the minimum.*


### 6.5.1 System Tab

The System tab contains 4 windows that provide access to firmware version information, a firmware update interface, utilities for rebooting and resetting the unit, basic EDID management, Telnet command entry, and a variety of statistics and information about the operational state of the unit.

- 1) **Version Information:** This window displays detailed information about the current firmware version.

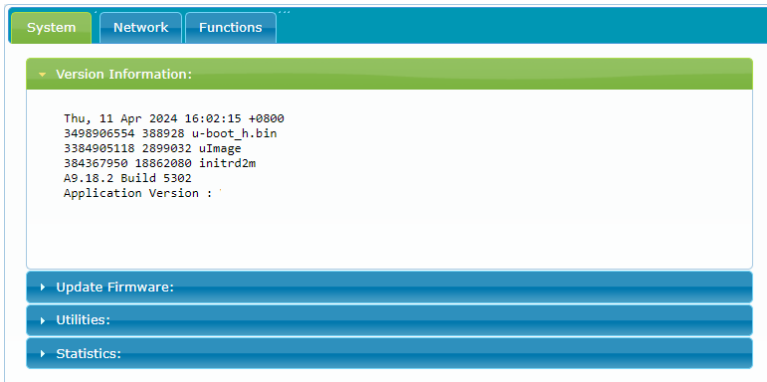


- 2) **Update Firmware:** Provides a way to update the unit's firmware. Click "Choose File" to select the firmware update file from the local PC (\*.bin format). After selecting an appropriate file, click the "Upload" button to begin the update process.

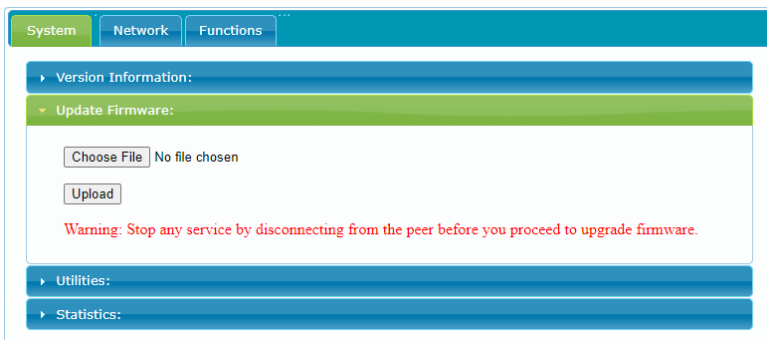

**3) Utilities:** The Utilities window allows users to reset the unit back to the factory defaults by clicking “Factory Default”. The unit may be rebooted (without resetting settings) by pressing the “Reboot” button.

If the EDID received from the primary receiver unit (selected via a checkbox on the preferred receiver in multicast mode) has compatibility issues with the connected HDMI source, the default Internal HDMI EDID (up to 4K60 w/audio) can be selected. Please press “Apply” after making the selection.

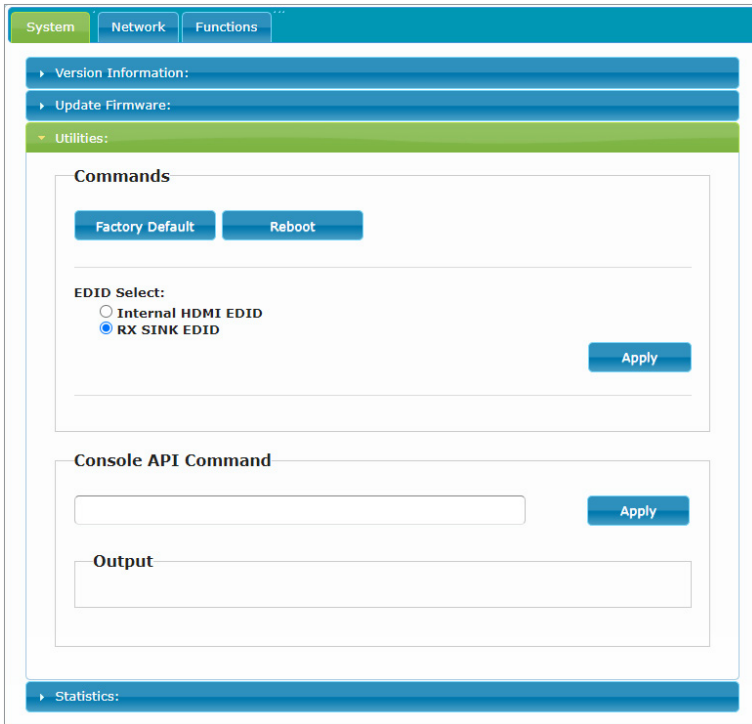

Finally, individual Telnet commands may be sent to the unit by using the “Console API Command” text entry field and pressing “Apply”. Any responses from the unit will be displayed in the “Output” field.

- 4) **Statistics:** The Statistics window shows all available information about the operational status of the unit, including current ID Channel, serial number, Ethernet information, MAC address, unicast/multicast mode, link status and mode, as well as the real-time details of the video source currently received on the unit.

System
Network
Functions

- Version Information:
- Update Firmware:
- Utilities:
- Statistics:

**State Machine**

State: s\_srv\_on

**Network**

ID (Channel): 52

IP Address: 169.254.3.237

Subnet Mask: 255.255.0.0

Default Gateway: 169.254.0.254

MAC Address:

Casting Mode: Multicast Mode

Link Status: on

Link Mode: 1G

S/N:

**Video**

EDID Used:

```

00 ff ff ff | ff ff ff 00 | 0f 30 00 00 | 01 00 00 00 |
21 20 01 03 | 80 0c 09 78 | 0a 1e ac 96 | 59 16 83 28 |
29 52 57 25 | 4b 00 81 c0 | 81 80 a9 c0 | a9 40 d1 c0 |
71 4f d1 00 | 81 00 08 e8 | 00 30 f2 70 | 5a 80 b0 58 |
8a 00 a0 5a | 00 00 00 1e | 02 3a 80 18 | 71 38 2d 40 |
58 2c 45 00 | a0 5a 00 00 | 00 1e 00 00 | 00 fe 00 43 |
53 43 2d 56 | 50 52 2d 33 | 34 32 31 0a | 00 00 00 fd |
00 17 3d 0f | 88 3c 00 0a | 20 20 20 20 | 20 20 01 78 |
02 03 43 f0 | 52 10 05 20 | 22 04 03 12 | 13 14 1f 65 |
60 66 61 64 | 62 3f 5d 13 | 09 04 07 83 | 01 00 00 77 |
03 0c 00 10 | 00 b8 3c 2f | 00 60 01 03 | 04 00 00 00 |
00 00 00 00 | 00 00 00 67 | d8 5d c4 01 | 78 80 00 e3 |
0f 00 3c 02 | 3a 80 18 71 | 38 2d 40 58 | 2c 45 00 a0 |
5a 00 00 00 | 1e e2 68 00 | a0 a0 40 2e | 60 30 20 36 |
00 a0 64 00 | 00 00 1a 00 | 00 00 00 00 | 00 00 00 00 |
00 00 00 00 | 00 00 00 00 | 00 00 00 00 | 00 00 00 88 |
                
```

Local Video Output:

Attached: n

Video Timing Information:

```

src timing table[0x0000]: serial number[0x0000] [1920]x[1080] [60]Hz
Pixel Rate: 148500KHz, Htotal: 2200, Vtotal: 1125
Hbp: 148, Vbp: 36, Hsw: 44, Vsw: 5
Progressive, VPOS, VPOS
src Refresh rate: [60]Hz
src Signal type: HDMI 16:9
src Scan Mode: Progressive
src Color Depth: [0]
src Pixel Format: RGB
src Colorimetry: RGB
src Quantization: Full
HDR: [off]
TTL: SDR, 1ch
HDCP: [off]
HDCP convert: disable
capture windows: [1920]x[1080] [60]Hz
compress windows: [1920]x[1080] [60]Hz
active windows: [1920]x[1080] [60]Hz
CRT windows: [1920]x[1080]
                
```

### 6.5.2 Network Tab

The Network tab provides controls over the transmitter’s IP configuration, network broadcast mode, and broadcast channel. Changes made to the network settings will require a reboot of the unit. After clicking on “Apply” please follow the reboot instructions in the WebGUI.

*Note: If the IP address is changed then the IP address required for WebGUI access will also change accordingly. If the new address is assigned via “Auto IP” or “DHCP” it might temporarily disable the Video Link between the receiver and transmitter in order to display the units’ new IP addresses on the receiver’s HDMI output.*

System Network Functions

#### IP Setup

IP Mode:  Auto IP  DHCP  Static

IP Address:

Subnet Mask:

Default Gateway:

Find Your Device:  Hide Me  Show Me

Apply

#### Casting Mode

Multicast  Unicast

Apply

#### ID (Channel)

Apply

Reboot

1) **IP Setup:** This section allows for configuration of the IP acquisition mode and Ethernet settings of the unit. It also provides an easy way to find the physical unit when installed with many other similar units.

- **IP Mode & Settings:** The IP mode may be switched between “Auto IP”, “DHCP” or “Static IP”. When the unit is set to Auto IP mode it will automatically assign itself an APIPA address from the 169.254.xxx.xxx range. When the unit is set to DHCP mode it will attempt to automatically obtain an IP address from a DHCP server. When the IP mode is set to static IP, you can manually set the IP address, netmask and gateway address. Click the “Apply” button to save changes made to the IP Mode or Configuration.

*Note: The default network setting for this unit is “Auto IP”.*

- **Find Your Device:** Selecting “Show Me” will cause the unit to immediately begin flashing the LEDs on the front of the unit to make it easy to find. Selecting “Hide Me” returns the LEDs to their normal behavior. This setting is useful when troubleshooting an installation with a large number of units in a rack.

2) **Casting Mode:** Allows for the selection of the network broadcast mode supported by the transmitter. Click the “Apply” button to save changes made to the broadcast mode.

*Note: Receivers must be set to the same mode as the transmitter in order to receive video.*


- **Multicast:** This mode sends a single video stream that can be viewed simultaneously by multiple receivers without increasing bandwidth usage. This mode is ideal for video wall or matrixing scenarios. Multicast mode requires a network switch with IGMP snooping enabled.
- **Unicast:** This mode uses a discrete video stream for every connected receiver and is ideal for simple, point-to-point, streaming setups. This mode uses considerably more bandwidth than Multicast Mode when multiple receivers are being used, however it does not require a network switch that supports IGMP snooping.

3) **ID (Channel):** To change the broadcast reception channel for the transmitter, type the new channel in the space provided. All receivers on the local network that are set to the same channel will receive video from this transmitter. The available channel range is from 0 to 255.

### 6.5.3 Functions Tab

The Functions tab provides control over the transmitter’s wide variety of optional features, including USB and serial control extension. Changes made to these settings typically require a reboot of the unit. After clicking on “Apply” please follow the reboot instructions in the WebGUI, if necessary.

- 1) **USB over IP:** This section provides controls for the USB over IP extension functionality, including enabling/disabling USB support, changing the USB operational mode, and enabling special compatibility modes.

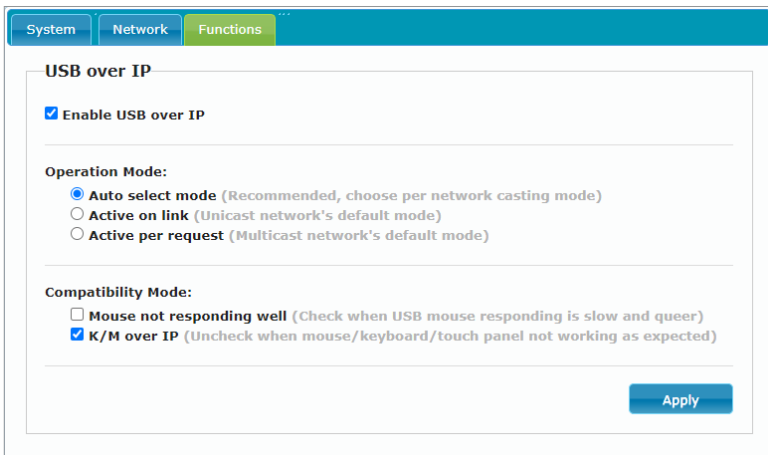

- **Enable USB over IP:** Unchecking this checkbox will completely disable support for USB over this stream. This option should generally remain checked, but, if USB support is not required, disabling this feature can save some bandwidth.
- **Operation Mode:** Sets the USB extension mode. Available options are Auto, Active on link (Unicast optimised), and Active per request (Multicast optimised). Auto mode is set by default and will automatically select the correct mode depending on the broadcast mode of the unit.
- **Compatibility Mode:** These troubleshooting options enable specialised optimisations to solve issues when a mouse or touch panel is not responding properly.

- 2) **Serial over IP:** This section provides controls for the Serial over IP extension functionality, including enabling/disabling serial support and setting the RS-232 data configuration.

**Serial over IP**

Enable Serial over IP

---

**Baudrate Setting for Type 2:**

Baudrate: 115200 ▼

Data bits: 8 ▼

Parity: None ▼

Stop bits: 1 ▼

Apply

Reboot

- **Enable Serial over IP:** Unchecking this checkbox will completely disable support for sending RS-232 commands over this stream. This option should generally remain checked, but, if serial support is not required, disabling this feature can save a very small amount of bandwidth.
  - **Serial Settings:** Set the desired baud rate, data bits, parity, and stop bit for the RS-232 signal to extend.  
*Note: The transmitter and receiver must have the same serial settings.*
- 3) **Reboot:** Pressing this button will force the unit to reboot.

## 6.6 Telnet Control

Before attempting to use Telnet control, please ensure that both the unit and the PC are connected to the same active networks.

Start your preferred Telnet/Console client, or use the built in client provided by most modern computer operating systems. After starting the client, connect by using the current IP address of the unit and port 23 (if the communication port number used by the unit has not been changed previously). This will connect us to the unit we wish to control and commands may now be entered directly.

*Note 1: If the IP address of the unit is changed then the IP address required for Telnet access will also change accordingly.*

*Note 2: This unit defaults to Auto IP mode. The current IP address can be verified via the receiver's OSD if the Device Discovery software is not available. The default communication port is 23.*

## 6.7 Telnet Commands

COMMAND
Description and Parameters
<b>help</b> ↵
Show the full command list.
<b>help N1</b> ↵
Show help details about command <b>N1</b> . <b>N1</b> = {Any command name}
<b>get fw ver</b> ↵
Show the unit's current firmware version.
<b>get hw ver</b> ↵
Show the unit's current hardware version.
<b>get command ver</b> ↵
Show the unit's current command version

COMMAND	
Description and Parameters	
<b>get mac addr</b> ←	Show the unit's MAC address.
<b>get model name</b> ←	Show the unit's model name.
<b>get model type</b> ←	Show the unit's product type.
<b>set factory default</b> ←	Reset the unit to the factory defaults.
<b>set factory ipconfig default</b> ←	Reset the unit's network settings to the factory defaults.
<b>get user config</b> ←	List the unit's current configuration information.
<b>set nickname N1</b> ←	Set the name of the unit's nickname. Available values for <b>N1</b> : <b>N1</b> = {ASCII string}                      [Nickname]
<b>get nickname</b> ←	Show the name of the unit's nickname.
<b>set feedback broadcast N1</b> ←	Enable or disable the broadcast of console command feedback. Available values for <b>N1</b> : ON    [Enabled] OFF    [Disabled]
<b>get feedback broadcast</b> ←	Show the current console command feedback broadcast state.

COMMAND	
Description and Parameters	
<b>set system reboot</b> ←	Reboot the unit.
<b>set uart 1 reset</b> ←	Reset the settings of the RS-232 port to the factory defaults.
<b>set uart 1 baudrate N1</b> ←	Set the baud rate of the RS-232 port. Available values for <b>N1</b> : 4800 [4800 baud] 9600 [9600 baud] 19200 [19200 baud] 38400 [38400 baud] 57600 [57600 baud] 115200 [115200 baud]
<b>get uart 1 baudrate</b> ←	Show the current baud rate of the RS-232 port.
<b>set uart 1 stop bit N1</b> ←	Set the number of stop bits for the RS-232 port. Available values for <b>N1</b> : 1~2 [Stop bits]
<b>get uart 1 stop bit</b> ←	Show the current number of stop bits of the RS-232 port.
<b>set uart 1 data bit N1</b> ←	Set the data bits for the RS-232 port. Available values for <b>N1</b> : 5~8 [Data bits]
<b>get uart 1 data bit</b> ←	Show the current number of data bits of the RS-232 port.

COMMAND	
Description and Parameters	
<b>set uart 1 parity N1</b> ↵	
Set the parity of the RS-232 port	
Available values for <b>N1</b> :	
0	[None]
1	[Odd]
2	[Even]
<b>get uart 1 parity</b> ↵	
Show the current parity setting of the RS-232 port.	
<b>set ip mode N1</b> ↵	
Set the unit's IP address assignment mode.	
Available values for <b>N1</b> :	
STATIC	[Static IP mode]
DHCP	[DHCP mode]
FORCE IP	[Auto IP mode]
<b>get ip mode</b> ↵	
Show the current IP address assignment mode.	
<b>get ipconfig</b> ↵	
Show the unit's current IP configuration information.	
<b>get ipaddr</b> ↵	
Show the unit's current IP address.	
<b>get netmask</b> ↵	
Show the unit's current netmask.	
<b>get gateway</b> ↵	
Show the unit's current gateway address.	
<b>set static ipaddr N1</b> ↵	
Set the unit's static IP address.	
<b>N1</b> = X.X.X.X	[X = 0~255, IP address]

COMMAND	
Description and Parameters	
<b>get static ipaddr</b> ↵	Show the unit's current static IP address.
<b>set static netmask N1</b> ↵	Set the unit's static netmask. <b>N1</b> = X.X.X.X [X = 0~255, Netmask]
<b>get static netmask</b> ↵	Show the unit's current static netmask.
<b>set static gateway N1</b> ↵	Set the unit's static gateway address. <b>N1</b> = X.X.X.X [X = 0~255, Gateway address]
<b>get static gateway</b> ↵	Show the unit's current static gateway address.
<b>get hostname</b> ↵	Show the unit's current hostname
<b>get in 1 color space</b> ↵	Show the current colour space format of the input. Possible response values: 0 [Unknown] 1 [RGB] 3 [YUV444] 4 [YUV422] 5 [YUV420]
<b>get in 1 hactive</b> ↵	Show the horizontal active pixel value of the input's current video source.
<b>get in 1 vactive</b> ↵	Show the vertical active pixel value of the input's current video source.

COMMAND	
Description and Parameters	
<b>get in 1 refresh rate</b> ←	
Show the refresh rate of the input's current video source.	
<b>get in 1 interlace</b> ←	
Show the interlace state of the specified input's current video source.	
Possible response values:	
0	[Not interlaced]
1	[Interlaced]
<b>get in 1 sync status</b> ←	
Show the current sync state of the specified input.	
Possible response values:	
0	[No sync detected]
1	[Sync active]
<b>get in 1 deep color</b> ←	
Show the detected bit depth of the signal on the input.	
<b>get in 1 type</b> ←	
Show the port type of the input on the unit.	
<b>set audio out A route N1</b> ←	
Route the specified audio input to the audio output.	
Available values for <b>N1</b> :	
1	[HDMI Input]
2	[LINE Input]
<b>get audio out A route</b> ←	
Show the current audio input routed to the audio output.	
<b>set audio in 1 mute N1</b> ←	
Set the volume mute state for the audio input.	
Available values for <b>N1</b> :	
ON	[Mute]
OFF	[Unmute]

COMMAND	
Description and Parameters	
<b>get audio in 1 mute</b> ←	
	Show the current volume mute state for the audio input.
<b>set in 1 edid N1</b> ←	
	Set the EDID to use on the input.
	Available values for <b>N1</b> :
1	[Internal EDID]
2	[Receiver's EDID]
<b>get in 1 edid</b> ←	
	Show the EDID currently being used on the input.
<b>get in edid list</b> ←	
	List all available EDID selections.
<b>get sink A edid data</b> ←	
	Show the EDID from the display connected to the receiver's output as hex data.
<b>get internal 1 edid data</b> ←	
	Show the Internal EDID as hex data.
<b>set in 1 hdcp mode N1</b> ←	
	Set the HDCP behavior of the input.
	Available values for <b>N1</b> :
0	[HDCP disabled]
2	[Follow display]
<b>get in 1 hdcp mode</b> ←	
	Show the current HDCP behavior used by the input.

COMMAND	
Description and Parameters	
<b>get in 1 hdcp status</b> ←	
Show the current HDCP status of the input.	
Possible response values:	
0	[No HDCP]
1	[HDCP 1.x active]
2	[HDCP 2.2 active]
3	[HDCP 1.x failed]
4	[HDCP 2.x failed]
<b>set tx channel N1</b> ←	
Set the VoIP transmission channel.	
<b>N1</b> = 0~255	[Transmission channel]
<b>get tx channel</b> ←	
Show the current VoIP transmission channel.	
<b>set showme N1</b> ←	
Enable or disable the unit's LEDs blinking to more easily visually identify the unit.	
Available values for <b>N1</b> :	
ON	[Enabled]
OFF	[Disabled]
<b>get showme</b> ←	
Show the current state of the showme function.	
<b>set maximum bitrate mode N1</b> ←	
Set the maximum AVoIP transmission's streaming bitrate.	
Available values for <b>N1</b> :	
0	[Default]
1	[50 Mbps]
2	[100 Mbps]
3	[200 Mbps]
4	[400 Mbps]
<b>get maximum bitrate mode</b> ←	
Show the AVoIP transmitter's current maximum streaming bitrate value.	

COMMAND	
Description and Parameters	
<b>set stream cast mode N1</b> ←	
Set the AVoIP transmitter's network broadcast mode.	
Available values for <b>N1</b> :	
unicast	[Unicast Mode]
multicast	[Multicast Mode]
<b>get stream cast mode</b> ←	
Show the AVoIP transmitter's current network broadcast mode.	
<b>set stream quality mode N</b> ←	
Enable or disable the AVoIP transmitter's video stream quality mode.	
Available values for <b>N1</b> :	
ON	[Enabled]
OFF	[Disabled]
<b>get stream quality mode</b> ←	
Show the AVoIP transmitter's current video stream quality setting.	
<b>set serial allow N1</b> ←	
Enable or disable the AVoIP serial route function.	
Available values for <b>N1</b> :	
ON	[Enabled]
OFF	[Disabled]
<b>get serial allow</b> ←	
Show the serial over IP status.	
<b>set ir allow N1</b> ←	
Enable or disable the AVoIP ir route function.	
Available values for <b>N1</b> :	
ON	[Enabled]
OFF	[Disabled]
<b>get ir allow</b> ←	
Show the ir over IP status.	

COMMAND	
Description and Parameters	
<b>set usb access sensitivity mode N1</b> ←↵	
Enable or disable the USB mouse sensitivity compatibility feature.	
Available values for <b>N1</b> :	
ON	[Enabled]
OFF	[Disabled]
<b>get usb access sensitivity mode</b> ←↵	
Show the current USB mouse sensitivity compatibility feature's state.	
<b>set usb allow N1</b> ←↵	
Enable or disable the AVoIP USB route function.	
Available values for <b>N1</b> :	
ON	[Enabled]
OFF	[Disabled]
<b>get usb allow</b> ←↵	
Show the USB over IP status.	
<b>set usb mode N1</b> ←↵	
Setting the AVoIP usb operation mode.(only setting on multicast mode)	
Available values for <b>N1</b> :	
0	[Active On Link]
1	[Active Per Request]
2	[Auto]
<b>get usb mode</b> ←↵	
Show the USB operation mode status.	
<b>set usb kmoip mode N1</b> ←↵	
Setting the AVoIP USB keyboard/mouse over IP mode.	
Available values for <b>N1</b> :	
ON	[Enabled]
OFF	[Disabled]
<b>get usb kmoip mode</b> ←↵	
Show the AVoIP USB keyboard/mouse over IP mode status.	

<b>COMMAND</b>	
<b>Description and Parameters</b>	
<b>set audio auto scan mode N1</b> ←↵	
Enable or disable the unit's audio input automatic source switching function.	
Available values for <b>N1</b> :	
ON	[Enabled]
OFF	[Disabled]
<b>get audio auto scan mode</b> ←↵	
Show the unit's current audio input automatic source switching setting.	

*Note: Commands will not be executed unless followed by a carriage return. Commands are case-sensitive and must be all caps.*

## 7. DANTE READY

### 7.1 Dante Ready Compatibility

#### Dante Overview

Dante is a network platform focusing on AV connectivity that's easy to use. It replaces all connections with a computer network, effortlessly sending video or hundreds of channels of audio over slender Ethernet cables with perfect digital fidelity. All connections are now managed with software, making routes fast, readable and reliable.

Because all devices share the same network, signals can be sent between any devices no matter where they are located on a site, with no change to the wiring at all. Dante systems are easily expanded, just connect additional devices to any available network jack and start using it.

#### Dante Ready Overview


Dante Ready provides a flexible way to enable and expand the connectivity and interoperability of the world's de-facto AV-over-IP solution, even after the initial purchase. Dante Ready is built within the widely used Dante Controller application for Dante audio and video subscription management. Transactions are simple and secure, and device upgrades are seamlessly actioned without the need to enter complex license keys of copy license files.

#### 7.1.1 Quick Walkthrough

- Step 1)** Make sure your computer and the Dante Ready device are both connected to the same network.
- Step 2)** Download and run Dante Controller (version 4.5 or later).  
*Note: The latest version of Dante Controller can be downloaded at [www.audinate.com](http://www.audinate.com).*
- Step 3)** Open the Dante Activator tool from Dante Controller.
- Step 4)** Your device will be discovered, and you will see your purchase options.
- Step 5)** Add options to your cart, check out, then your device will be activated.
- Step 6)** Enjoy your additional Dante channels!


### 7.1.2 Online Activation

This section demonstrates the steps a user would follow to discover and activate their Dante Ready product. Screens are indicative and may differ from the latest version of the Dante Activator utility.


**Step 1)** Dante Activator can be found on the taskbar in Dante Controller. To launch, click the Dante Activator button . An orange notification dot is displayed when an upgrade has been detected for a device on the network.




**Step 2)** Under the “Devices” side-tab, products that have available activations, upgrades or recoverable licenses are displayed to the user. New Activations enables Dante on products where no functionality was present. The Upgrade Available list contains products where additional channels or features can be unlocked. Recoverable is a list of devices that have been identified as having previously been licenses. A device may appear here after a manufacturer’s ‘factory reset’.

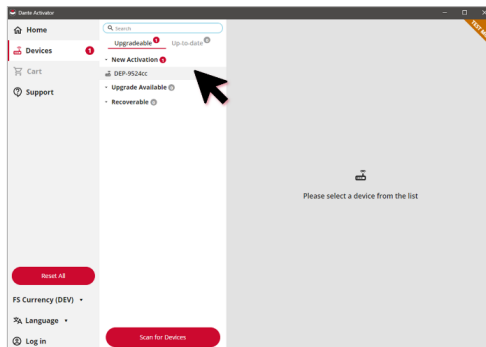


**Step 3)** Choosing a device will bring up the relevant Device Details page. The Device Details page outlines the activations and upgrades available for the device. Only one upgrade option is permitted. Prices are displayed in local currency.

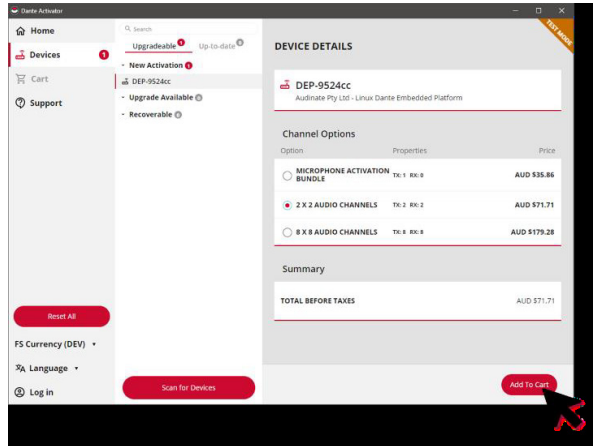


**Step 4)** Unless already logged in, users are required to log in to their audinate.com account to complete the transaction. This is the same account that used to download Dante Controller.

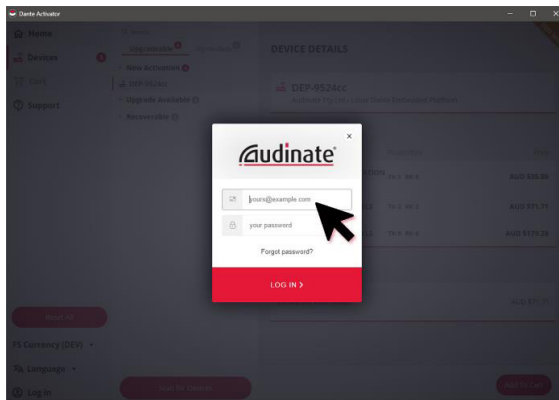


**Step 5)** A shopping cart summary is presented to allow the user to confirm the purchase. The shopping cart includes relevant local taxes.

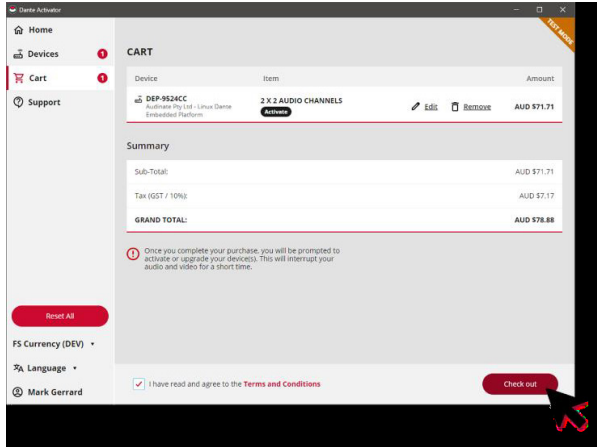


**Step 6)** Payment is via credit card or appropriate local payment method.

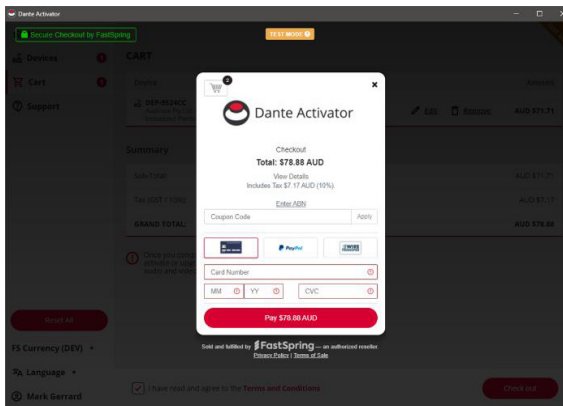


**Step 7)** Upon confirmation of the transaction, Dante Activator presents the purchased licenses and provides an option to activate the devices now. Clicking “Activate Now” will transfer the license to the local Dante device and instantly unlock the purchased features.

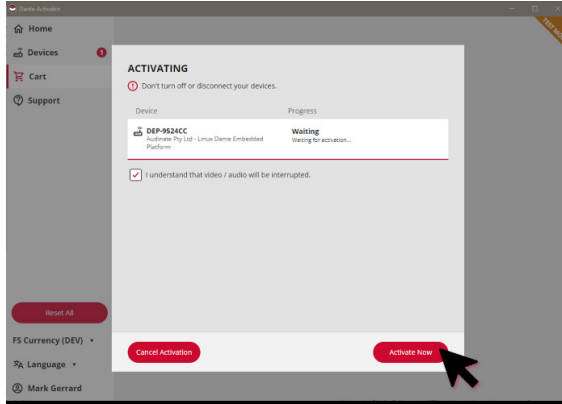

**Step 8)** Updates are shown in Dante Controller with new channels immediately available for subscriptions and routes.

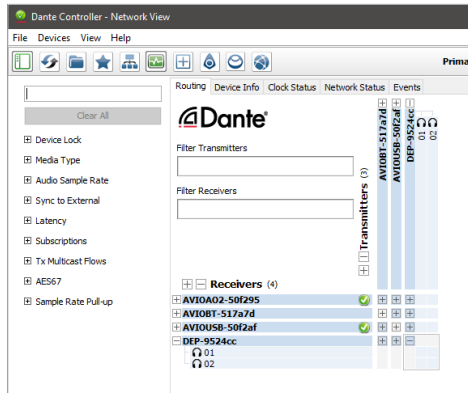

# 8. CONNECTION DIAGRAM

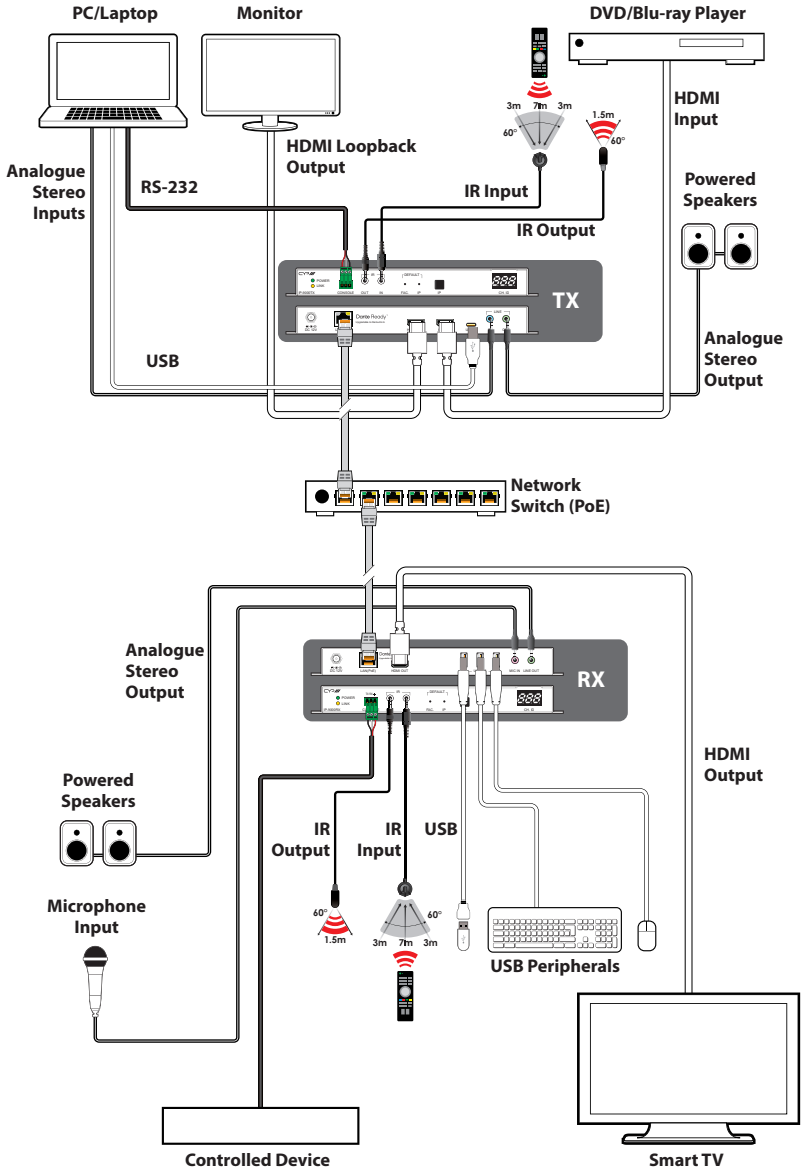

## 9. SPECIFICATIONS

### 9.1 Technical Specifications

<b>HDMI Bandwidth</b>	18Gbps
<b>Input Ports</b>	1×HDMI (Type-A) 1×Stereo Audio (3.5mm)
<b>Output Ports</b>	1×HDMI (Type-A) 1×Mono Audio (3.5mm)
<b>Output/Control Port</b>	1×GbE LAN (RJ-45)
<b>Pass-through Ports</b>	1×IR Extender (3.5mm) 1×IR Blaster (3.5mm) 1×RS-232 (3-pin Terminal Block) 1×USB 2.0 (Type-C)
<b>IR Frequency</b>	30 ~ 50kHz (30 ~ 60kHz under ideal conditions)
<b>Baud Rate</b>	Up to 115200
<b>Power Supply</b>	12V/1.25A DC (US/EU standards, CE/FCC/UL certified)
<b>PoE Support</b>	802.3af minimum
<b>ESD Protection (HBM)</b>	±8kV (Air Discharge) ±4kV (Contact Discharge)
<b>Dimensions (W×H×D)</b>	231.5mm×25mm×108mm [Case Only] 231.5mm×25mm×120mm [All Inclusive]
<b>Weight</b>	660g
<b>Chassis Material</b>	Metal (Steel)
<b>Chassis Colour</b>	Black
<b>Operating Temperature</b>	0°C – 50°C/32°F – 122°F
<b>Storage Temperature</b>	-20°C – 60°C/-4°F – 140°F
<b>Relative Humidity</b>	20 – 90% RH (Non-condensing)
<b>Power Consumption</b>	7.19W

## 9.2 Video Specifications

Supported Resolutions (Hz)	Input	Output	
	HDMI	HDMI	AVoIP
<b>720×400p@70/85</b>	✓	✓	✓
<b>640×480p@60/72/75/85</b>	✓	✓	✓
<b>720×480i@60</b>	✓	✓	✓
<b>720×480p@60</b>	✓	✓	✓
<b>720×576i@50</b>	✓	✓	✓
<b>720×576p@50</b>	✓	✓	✓
<b>800×600p@56/60/72/75/85</b>	✓	✓	✓
<b>848×480p@60</b>	✓	✓	✓
<b>1024×768p@60/70/75/85</b>	✓	✓	✓
<b>1152×864p@75</b>	✓	✓	✓
<b>1280×720p@50/60</b>	✓	✓	✓
<b>1280×768p@60/75/85</b>	✓	✓	✓
<b>1280×800p@60/75/85</b>	✓	✓	✓
<b>1280×960p@60/85</b>	✓	✓	✓
<b>1280×1024p@60/75/85</b>	✓	✓	✓
<b>1360×768p@60</b>	✓	✓	✓
<b>1366×768p@60</b>	✓	✓	✓
<b>1400×1050p@60</b>	✓	✓	✓
<b>1440×900p@60/75</b>	✓	✓	✓
<b>1600×900p@60RB</b>	✓	✓	✓
<b>1600×1200p@60</b>	✓	✓	✓
<b>1680×1050p@60</b>	✓	✓	✓
<b>1920×1080i@50/60</b>	✓	✓	✓
<b>1920×1080p@24/25/30</b>	✓	✓	✓
<b>1920×1080p@50/60</b>	✓	✓	✓
<b>1920×1200p@60RB</b>	✓	✓	✓

Supported Resolutions (Hz)	Input	Output	
	HDMI	HDMI	AVoIP
<b>2560×1440p@60RB</b>	x	x	x
<b>2560×1600p@60RB</b>	x	x	x
<b>2048×1080p@24/25/30</b>	x	x	x
<b>2048×1080p@50/60</b>	x	x	x
<b>3840×2160p@24/25/30</b>	✓	✓	✓
<b>3840×2160p@50/60 (4:2:0)</b>	✓	✓	✓
<b>3840×2160p@24, HDR10</b>	✓	✓	✓
<b>3840×2160p@50/60 (4:2:0),HDR10</b>	✓	✓	✓
<b>3840×2160p@50/60</b>	✓	✓	✓
<b>4096×2160p@24/25/30</b>	✓	✓	✓
<b>4096×2160p@50/60 (4:2:0)</b>	✓	✓	✓
<b>4096×2160p@24, HDR10</b>	✓	✓	✓
<b>4096×2160p@50/60 (4:2:0),HDR10</b>	✓	✓	✓
<b>4096×2160p@50/60</b>	✓	✓	✓

## 9.3 Audio Specifications

### 9.3.1 Digital Audio

HDMI Input / HDMI & AV over IP Output	
LPCM	
Max Channels	8 Channels
Sampling Rate (kHz)	32, 44.1, 48, 88.2, 96, 176.4, 192
Bitstream	
Supported Formats	Standard


### 9.3.2 Analogue Audio

Analogue Input	
Max Audio Level	2Vrms
Impedance	10k $\Omega$
Type	Unbalanced


Analogue Output	
Max Audio Level	2Vrms
THD+N	< -80dB@0dBFS 1kHz (A-wt)
SNR	> 80dB@0dBFS
Frequency Response	< $\pm 1$ dB@20Hz~20kHz
Crosstalk	< -80dB@10kHz
Impedance	470 $\Omega$
Type	Unbalanced

### 9.3.3 AVoIP Audio Availability

#### Unicast Data Transmission Mode:

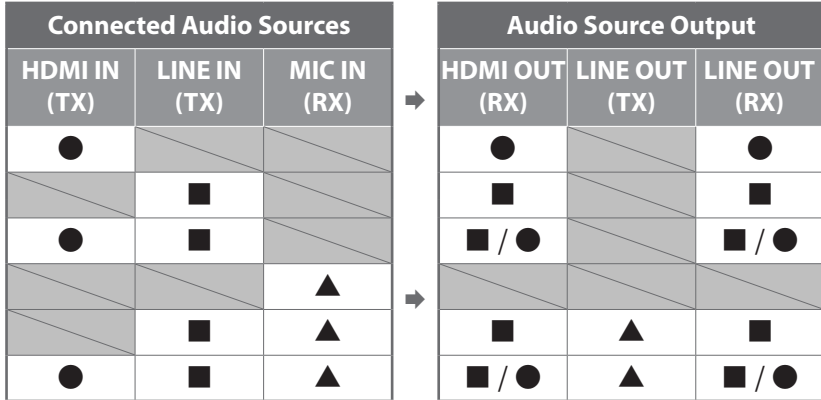

#### Multicast Data Transmission Mode:

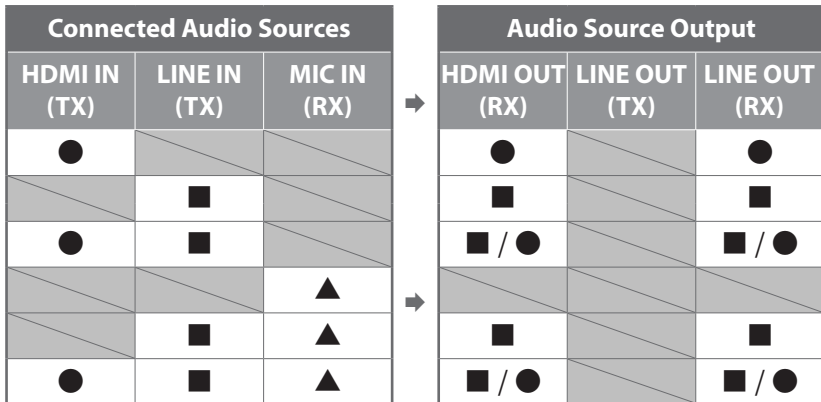

Legend:

- = HDMI audio source.
- = Line In (Transmitter) audio source.
- ▲ = Line In (Receiver) audio source.

## 9.4 Cable Specifications

Cable Length	HD	FHD	4K UHD	4K UHD <sup>+</sup>	8K UHD
<b>High Speed HDMI Cable</b>					
<b>HDMI Input</b>	15m	10m	5m	3m	×
<b>HDMI Output</b>	15m	10m	5m	3m	×
<b>Ethernet Cable</b>					
<b>Cat.5e/6</b>	100m				×
<b>Cat.6A/7</b>	100m				×

### Bandwidth Category Examples:

- **HD Video**

- 720p@60Hz
- HDMI transmission rates lower than 3Gbps
- HD-SDI (SMPTE 292M, 1.485Gbps)

- **FHD Video**

- 1080p@60Hz
- HDMI transmission rates between 3Gbps and 5.3Gbps
- 3G-SDI (SMPTE 424M, 2.970Gbps)
- 4K UHD Video
- 4K@24/25/30Hz (8-bit colour) & 4K@50/60Hz (4:2:0, 8-bit colour)
- HDMI transmission rates between 5.3Gbps and 10.2Gbps
- 6G-SDI (SMPTE ST 2081, 6Gbps)

- **4K UHD<sup>+</sup> Video**

- 1080p@120Hz (10/12-bit HDR)
- 4K@50/60Hz (4:4:4, 8-bit) & 4K@50/60Hz (4:2:0, 10/12-bit HDR)
- HDMI transmission rates between 10.2Gbps and 18Gbps
- 12G-SDI (SMPTE ST 2082, 12Gbps)

- **8K UHD Video**

- 4K@120Hz (10/12-bit HDR)
- 8K@24/25/30Hz (10/12-bit HDR) & 8K@50/60Hz (4:2:0, 8-bit colour)
- HDMI transmission rates between 18Gbps and 48Gbps
- 24G-SDI (SMPTE ST 2083, 24Gbps)

## 10. ACRONYMS

ACRONYM	COMPLETE TERM
<b>4K UHD</b>	4K Ultra-High-Definition (10.2Gbps max)
<b>4K UHD+</b>	4K Ultra-High-Definition (18Gbps max)
<b>ADC</b>	Analogue-to-Digital Converter
<b>ASCII</b>	American Standard Code for Information Interchange
<b>AV</b>	Audio/Video
<b>AVoIP</b>	Audio/Video over IP
<b>Cat.5e</b>	Enhanced Category 5 cable
<b>Cat.6</b>	Category 6 cable
<b>Cat.6A</b>	Augmented Category 6 cable
<b>Cat.7</b>	Category 7 cable
<b>CLI</b>	Command-Line Interface
<b>DAC</b>	Digital-to-Analogue Converter
<b>dB</b>	Decibel
<b>DHCP</b>	Dynamic Host Configuration Protocol
<b>DVI</b>	Digital Visual Interface
<b>EDID</b>	Extended Display Identification Data
<b>GbE</b>	Gigabit Ethernet
<b>Gbps</b>	Gigabits per second
<b>GUI</b>	Graphical User Interface
<b>HDCP</b>	High-bandwidth Digital Content Protection
<b>HDMI</b>	High-Definition Multimedia Interface
<b>HDR</b>	High Dynamic Range
<b>HID</b>	Human Interface Device
<b>HPD</b>	Hot Plug Detection
<b>IGMP</b>	Internet Group Management Protocol
<b>IP</b>	Internet Protocol
<b>IR</b>	Infrared

ACRONYM	COMPLETE TERM
<b>kHz</b>	Kilohertz
<b>LAN</b>	Local Area Network
<b>LED</b>	Light-Emitting Diode
<b>LPCM</b>	Linear Pulse-Code Modulation
<b>MAC</b>	Media Access Control
<b>MJPEG</b>	Motion JPEG
<b>MHz</b>	Megahertz
<b>OLED</b>	Organic Light-Emitting Diode
<b>OSD</b>	On-Screen Display
<b>PD</b>	Powered Device
<b>PoE</b>	Power over Ethernet
<b>PSE</b>	Power Sourcing Equipment
<b>SNR</b>	Signal-to-Noise Ratio
<b>TCP</b>	Transmission Control Protocol
<b>THD+N</b>	Total Harmonic Distortion plus Noise
<b>TMDS</b>	Transition-Minimised Differential Signaling
<b>UAC</b>	USB Audio Class
<b>USB</b>	Universal Serial Bus
<b>UVC</b>	USB Video Class
<b>VLAN</b>	Virtual LAN
<b>VoIP</b>	Video over IP
<b>XGA</b>	Extended Graphics Array
<b>Ω</b>	Ohm





---

CYP (UK) Ltd., Unit 7, Shepperton Business Park, Govett Avenue,  
Shepperton, Middlesex, TW17 8BA

Tel: +44 (0) 20 3137 9180 | Fax: +44 (0) 20 3137 6279

Email: [sales@cypeurope.com](mailto:sales@cypeurope.com)

[www.cypeurope.com](http://www.cypeurope.com)

v1.03